




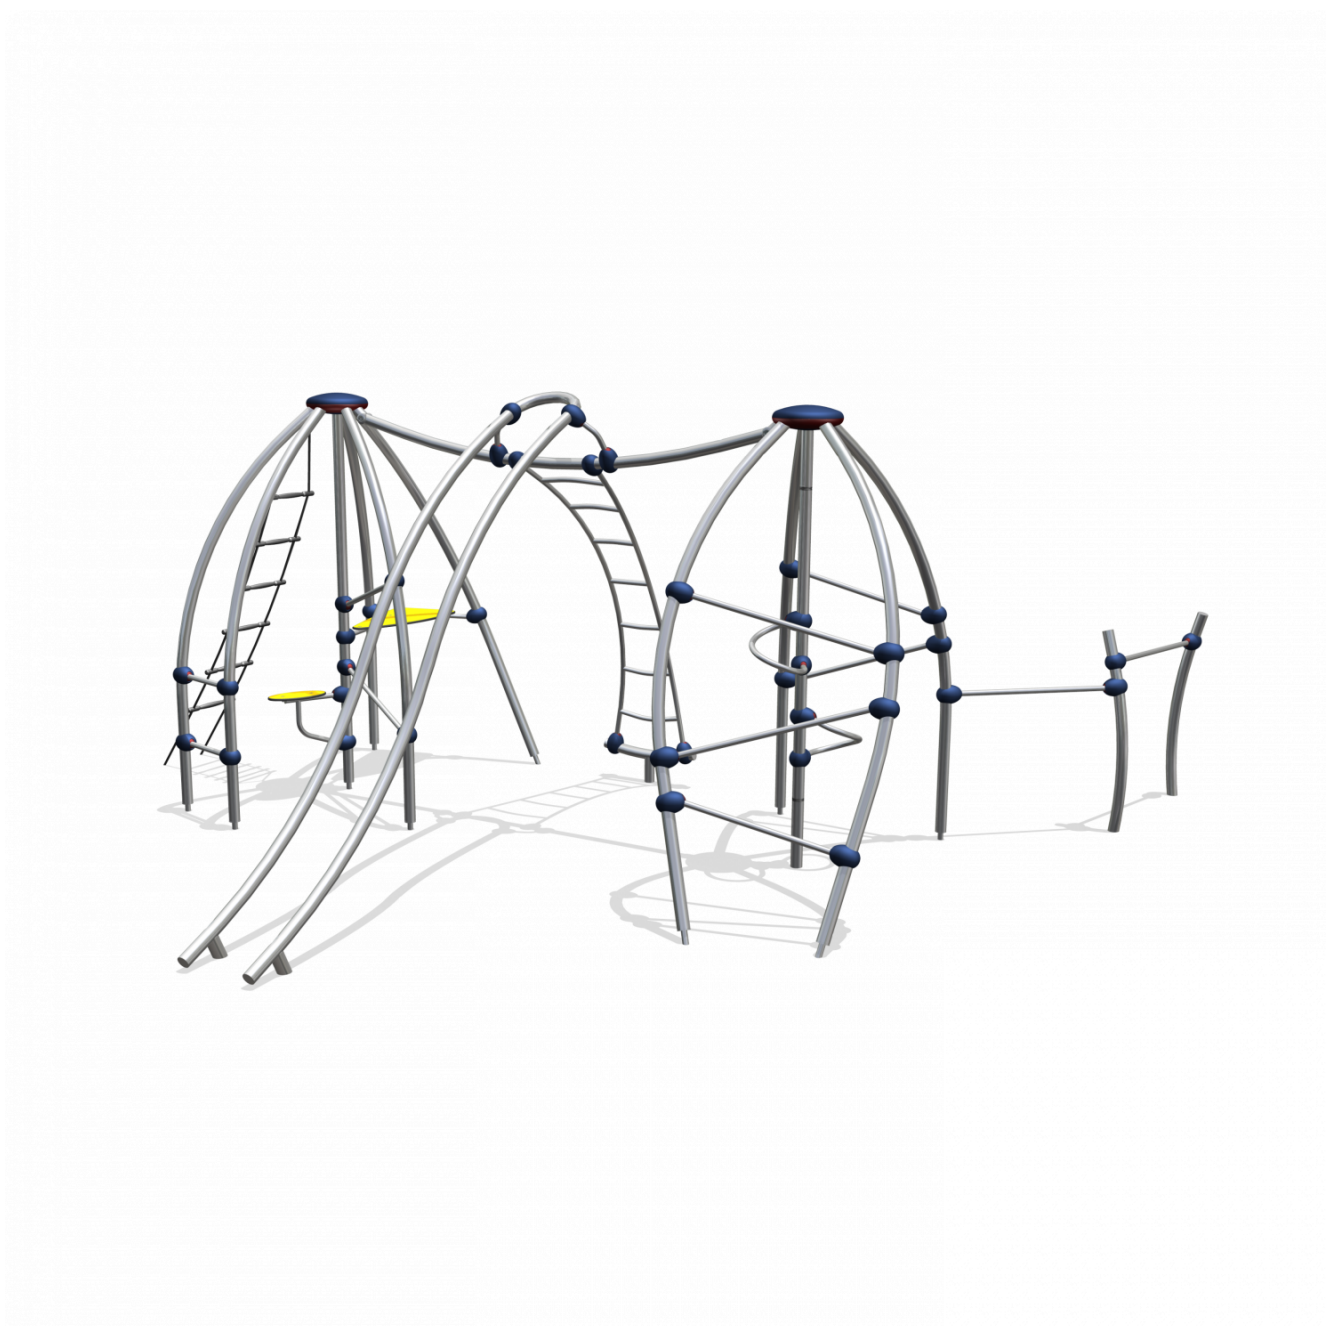

Pioneer Diocles 018

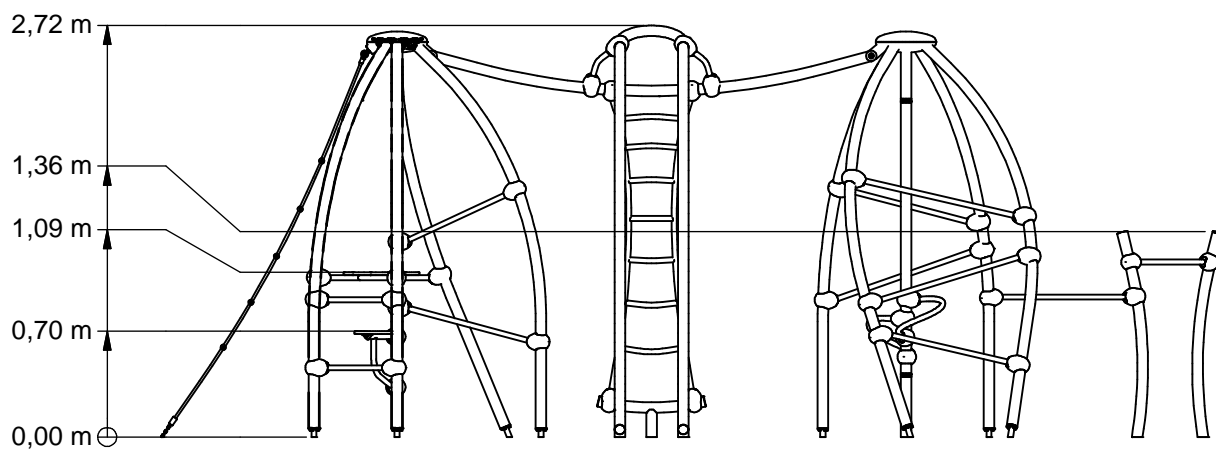

PNRE020.018

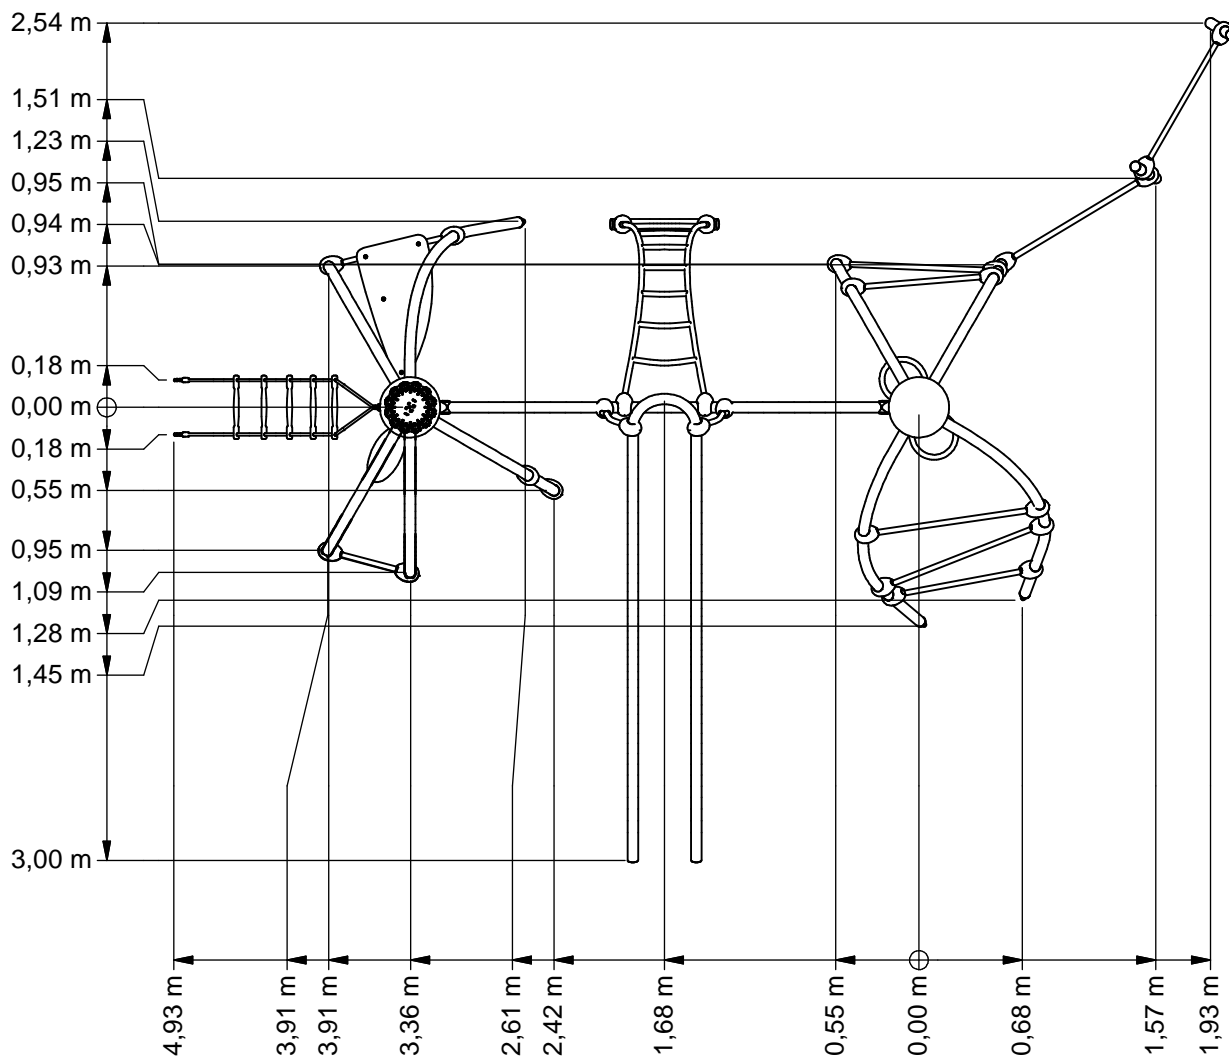

Benaming
Title Diocles 018


Opmerking
Comment Pionier

Datum
Date 18-11-2011

Tekening
Drawing

TOE PNR 020 018 A

Afmetingen Dimensions

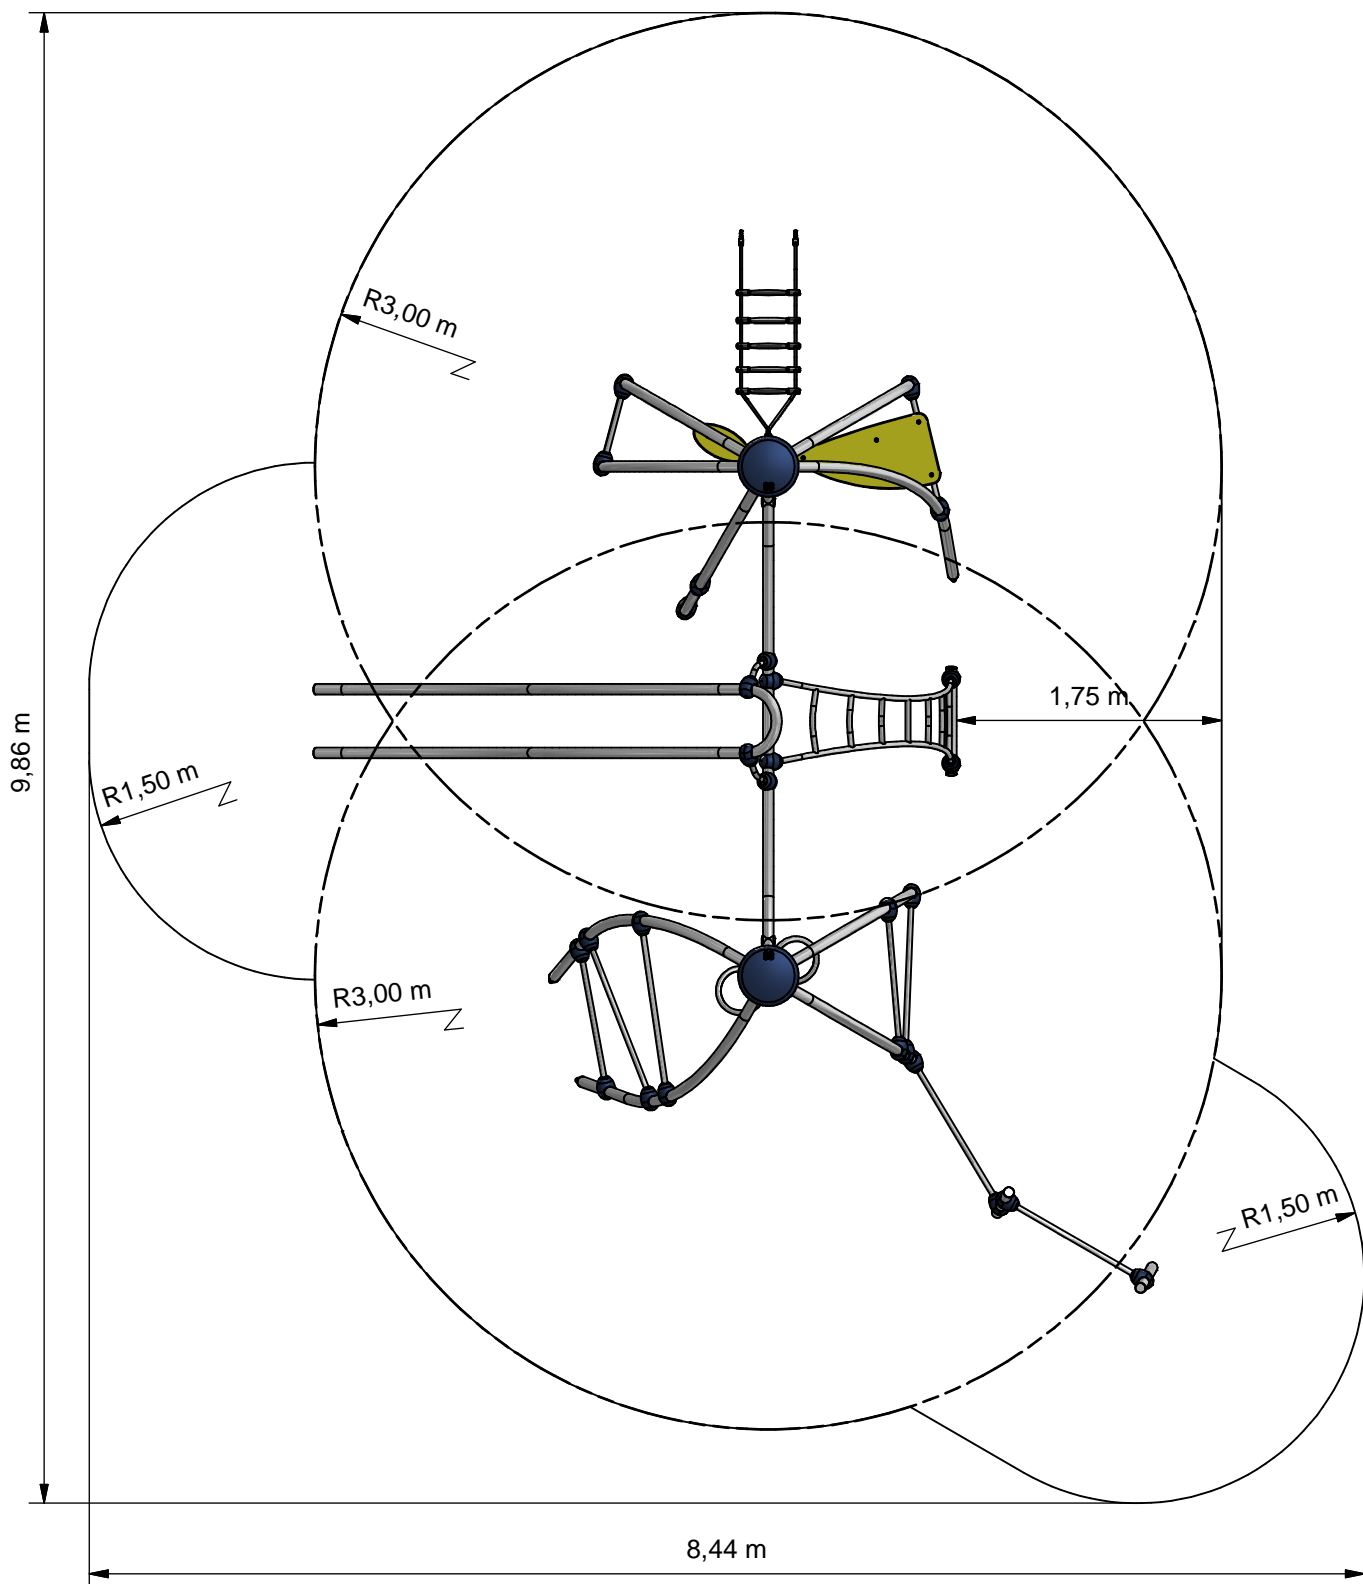

- Opvangzone
Impact area
- Obstakelvrije zone
Obstacle free zone





Benaming
Title Diocles 018

Opmerking
Comment Pionier

Datum
Date 18-11-2011

Tekening
Drawing

TOE PNR 020 018 A
Obstakelvrije zone *Obstacle free zone*

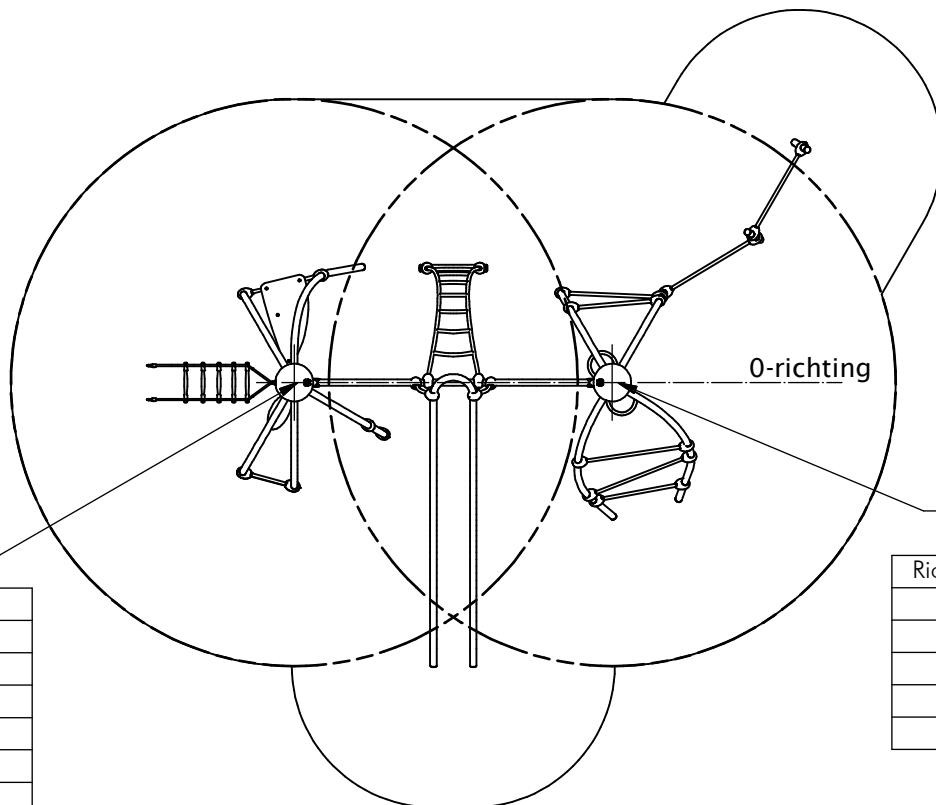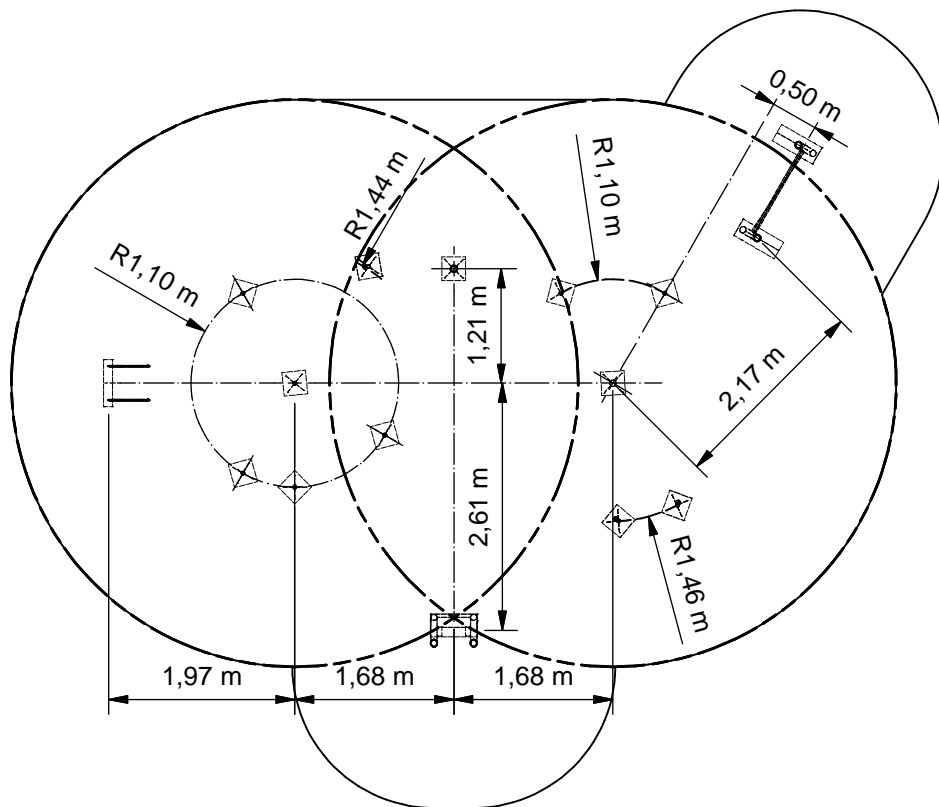

Topmodule A

Topmodule B

Richting	Stand
0	9
3	2
4	3
6	0
8	3
9	3
11	3

Richting	Stand
2	3
4	3
6	9
8	4
11	2



Benaming
Title Diocles 018

Opmerking
Comment Pionier

Datum
Date 18-11-2011

Tekening
Drawing

TOE PNR 020 018 A

Bodemplan Groundplan

Geleverde modules:

Zie tabel

Supplied modules:

See table

Montageinstructie:

- De hoofdmaten geven de maten van de staanders en vloeren aan
- De detailtekeningen geven specifiek de maten van de verbindingen aan
- De modules met buizen zijn op de tekeningen bemaat op bovenkant kopplaat
- Overige modules zijn bemaat op de bovenkant (klimwanden, paalkappen, etc.)

Assembly instruction:

- The main dimensions indicate the dimensions of the posts and floors
- The detailed dimensions show the specific dimensions of the connections
- The modules which contain tubes are dimensioned at the top of the flanges
- Other modules are dimensioned at the top (climbing walls, caps for the posts, etc.)

Montagevolgorde:

- 1 - Graaf de gaten volgens het bodemplan
- 2 - Assembleer toren 1,2,3(4x),6,7,9,11,12
- 3 - Plaats toren
- 4 - Assembleer 1,2,3(2x),4,8,10,13, plaats en verbind deze aan toren met 5
- 5 - Plaats 14,15,16,17 en verbind deze aan toren
- 6 - Controleer of het toestel voldoet aan de afmetingen zoals op blad 'afmetingen'
- 7 - Dicht de gaten en verdicht het zand

Installation sequence:


- 1 - Dig the holes according to the ground plan
- 2 - Assemble tower 1,2,3(4x),6,7,9,11,12
- 3 - Place tower
- 4 - Assemble 1,2,3(2x),4,8,10,13, place and attach it to tower using 5
- 5 - Place 14,15,16,17 and attach it to tower
- 6 - Check that the unit conforms to the dimensions on sheet 'dimensions'
- 7 - Close the holes and compacted the sand

Controles:

- 1 - Correcte opbouw en alle bevestigingsmiddelen
- 2 - Controleer de afmetingen van de valbodem t.o.v. het toestel

Checks:

- 1 - Correct assembly and all the fasteners
- 2 - Check the dimensions of the safety area with regard to the play equipment

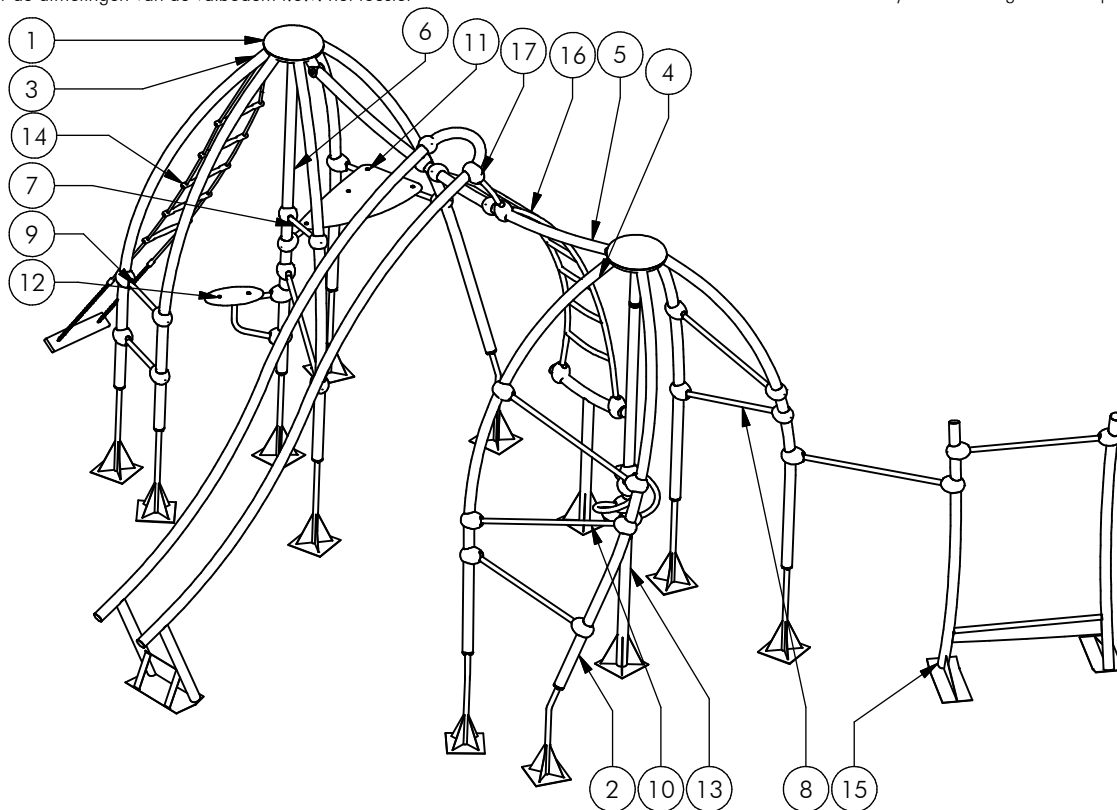

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	2	MOD	PNR	001	000		Topmodule	Pionier
2	2	MOD	PNR	002	000		Staander	Stand 2
3	6	MOD	PNR	003	000		Staander	Stand 3
4	1	MOD	PNR	004	000		Staander	Stand 4
5	1	MOD	PNR	005	000		TUSSENBUIS	STAND 393
6	1	MOD	PNR	010	000		Staander	Midden stand 0
7	1	MOD	PNR	304	300		Buizenwand	Half zeil
8	1	MOD	PNR	309	323		Buizenwand	Zig
9	1	MOD	PNR	310	313		Buizenwand	Recht
10	1	MOD	PNR	311	432		Buizenwand	Zig-zag
11	1	MOD	PNR	317	213	A	Vloer	Bol
12	1	MOD	PNR	323	000	A	Zitje	Recht
13	1	MOD	PNR	335	010		Staander	Wentel
14	1	MOD	PNR	337	003	A	Klimladder	Pionier
15	1	MOD	PNR	342	003		Aanbouwduikel	Enkel
16	1	MOD	PNR	347	393		Ladderboog	Dwars
17	1	MOD	PNR	348	393		Glijbuizen	Dwars



Benaming
Title Diocles 018

Opmerking
Comment Pionier

Datum
Date 18-11-2011

Tekening
Drawing

TOE PNR 020 018 A

Modules Modules

PNRE020.018

Pioneer Diocles 018

LOGBOOK

(Onderstaand logboek kan gebruikt worden om te voldoen aan de eisen, gesteld in artikel 14 van het Warenwetbesluit Attractie- en Speeltoestellen)

Type indication	Pioneer Play
Product code	PNRE020.018
Name of equipment	Pionier Diocles 018
Maximum height of fall	2,3 m
Year of construction	2017
Certificate	05200116226
inspection authority	Liftinstituut B.V. Buikslotermeerplein 381, A'dam - 1025 XE Amsterdam
Name manufacturer	BOERplay Hyacintstraat 2 - 4255 HX Nieuwendijk Phone: +31 (0)183 40 23 66 Fax: +31 (0)183 40 35 64
name installer	_____ _____
Description of equipment	Pioneer Diocles 018
Location of equipment	_____
Data about the owner of the play equipment	
Name:	_____
Address:	_____
Postcode and town:	_____
Contact person:	_____
Telephone number:	_____
Data about the administrator of the play equipment	
Name:	_____
Address:	_____
Postcode and town:	_____
Contact person:	_____
Telephone number:	_____

LOGBOOK

Inspection and maintenance intervals



Nr.	Inspection	Maintenance	months between inspections
1	Verify equipment's stability, junctions and missing parts. Inspect bolts, screws and nuts for absence, jams, corrosion and wear.	Add missing parts, secure joints, apply missing fixing agent and replace corroded parts.	1
2	Check suspension for wear.	Replace worn parts and/or remove non-functioning parts.	1
3	Inspect rotating parts such as hinges, rolling-element bearings, etc. for wear and acceptability.	Replace worn parts and/or remove non-functioning parts.	1
4	Check wood for splinters, unacceptable damage and signs of rot. Especially at ground level.	Repair damage. Replace affected wood. Smoothen splintered wood and sharp edges.	1
5	Inspect foundation for stability, tearing and coverage.	Restore foundation and covering material.	3
6	Examine rubber and synthetic parts for wear, damage and break.	Replace original parts.	3
7	Inspect metal for corrosion and damage in the coating.	Restore any damaged coating (after removing rust and applying primer).	6
8	Check ropes, cables, chains and nets for wear and damage. Steel cables and nets which are tensioned must be checked for tension.	Replace parts where necessary. Steel cables and nets must be tensioned.	3
9	Inspect equipment for unsafe changes and additions.	Remove unsafe additions and correct unsafe changes.	1
10	Inspect safety surfaces.	Restore and repair where necessary.	1

Remarks

1. If used intensively, all points require extra attention.
2. Extreme weather conditions and locations may require a higher inspection frequency. Discuss this with the supplier.
3. Vandalism-sensitive locations require stricter inspections, possibly daily.
4. Check the terrain regularly for items that do not belong there, are unsafe or may be used wrongly. Examples are poisonous plants, glass shards, etc. Frequency depends on strain.
5. Remember that bad maintenance leads to unsafe conditions and notably faster impoverishment of the playground area.
6. Replacement parts can be ordered at the manufacturer with the part numbers on the module drawing. Drawings can be found in de user guide.
7. The impact area shall be provided with impact attenuating surface according to the specified falling height.
8. This list is conform the CEN-standard "playground equipment and surfacing NEN-EN 1176-7".

TYPE-EXAMINATION CERTIFICATE

Acting under the " Warenwetbesluit Attractie- en Speeltoestellen" issued by Liftinstituut B.V.
commissioned by departmental order, no. VGP/P&L 2456476 from 17 march 2004.

Certificate nr. : NL 05-2001-162-26 Revision nr.: 200116226

Description of the product : Playground equipment, Pionier

Trademark, type : Speelwijzer, PNR.....

Name and address of the manufacturer : Speelwijzer / Dhr R. van Veen
Postbus 345
5300 AH Zaltbommel

Name and address of the certificate holder : Speelwijzer / Dhr R. van Veen
Postbus 345
5300 AH Zaltbommel

Certificate issued on the basis of the following requirements : Warenwetbesluit Attractie- en Speeltoestellen 3 september 1996

Test laboratory : None

Date and number of the laboratory report : None

Date of type-examination : - t/m -

Annexes with this certificate :

Additional remarks :


Conclusion : The playground equipment meets the requirements of the above specified European standard(s) and "Warenwetbesluit Attractie- en Speeltoestellen" taking into account any additional remarks mentioned above.



Issued in Amsterdam

Date of issue : Januari 28th, 2005

M. Dougué
Director
Liftinstituut B.V.

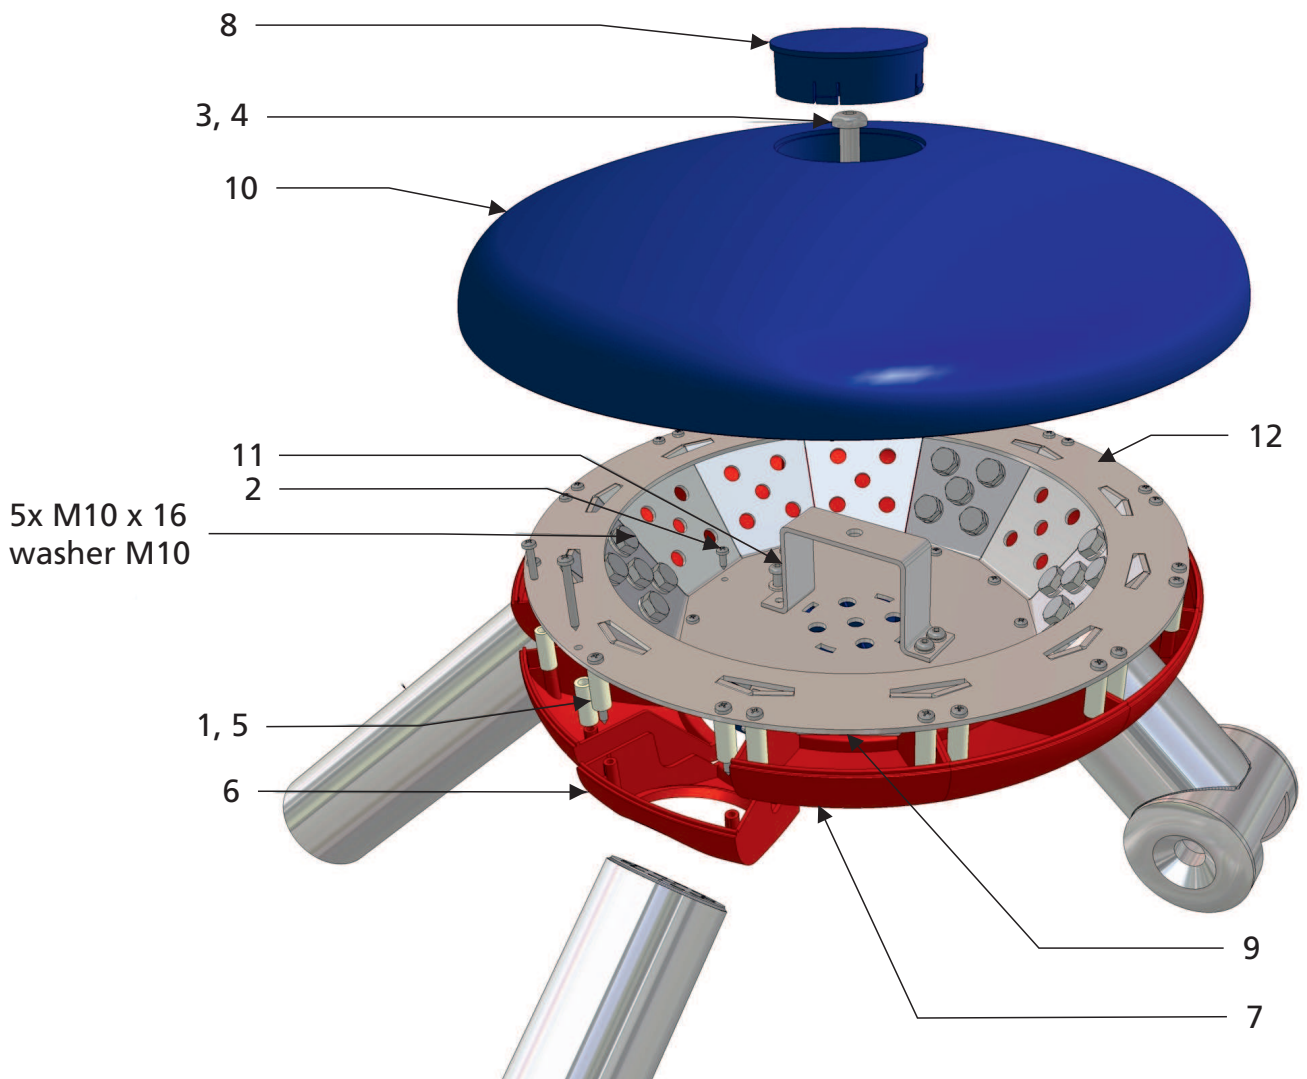

12	1	SME	PNR	003	320	D	TOPMODULE	STAALDEEL
11	1	OME	PNR	020	320	A	BEUGEL	TOPMODULE
10	1	KST	PNR	902	001	-	BOVENDEKSEL	TOPMODULE
9	1	KST	PNR	902	002	-	ONDERDEKSEL	TOPMODULE
8	2	KST	PNR	902	003	-	VULDOP	TOPMODULE
7	12	KST	PNR	902	005	-	WISSELDEEL DICHT	TOPMODULE
6	0	KST	PNR	902	004	-	WISSELDEEL OPEN	TOPMODULE
5	24	KST	BUS	006	025	-	AFSTANDBUS	NYLON
4	1	BSR	034	010	002	-	VEERING	M10
3	1	BSR	023	010	040	-	BOLKOPSCHROEF	M10 x 40
2	12	BSR	003	004	012	-	PANCIL. SCHROEF	4 x 12
1	24	BSR	003	004	040	-	PANCIL. SCHROEF	4 x 40
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING





Benaming Title Topmodule
 Opmerking Comment Pionier
 Datum Date 5-10-2009

Tekening Drawing

MOD PNR 001 000

Samenstelling module Assembly module

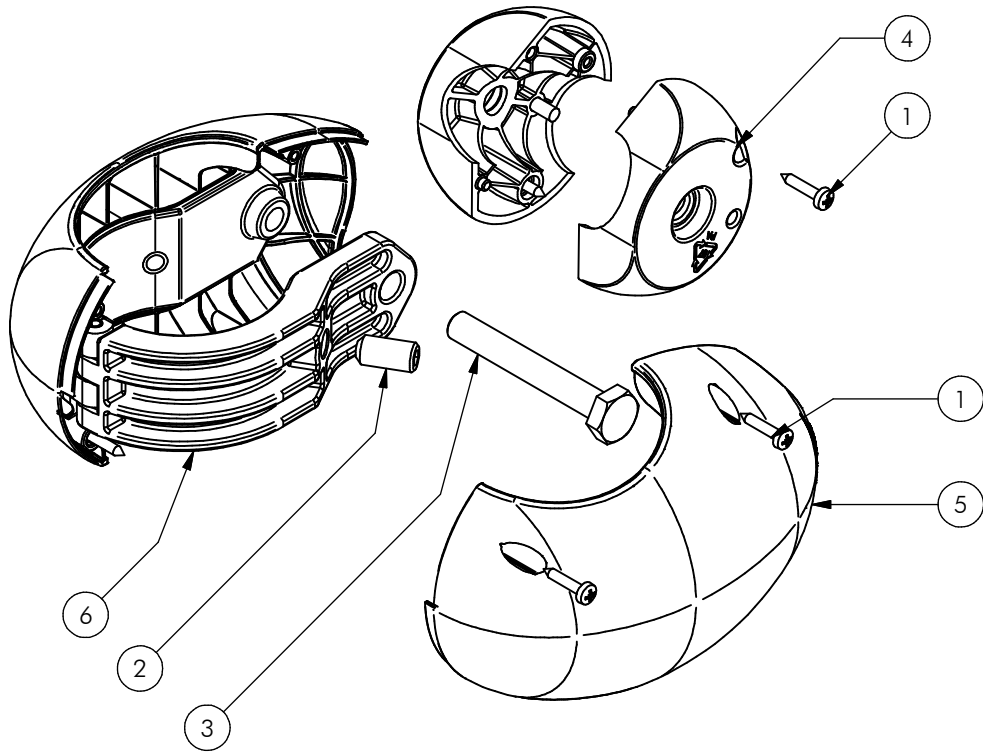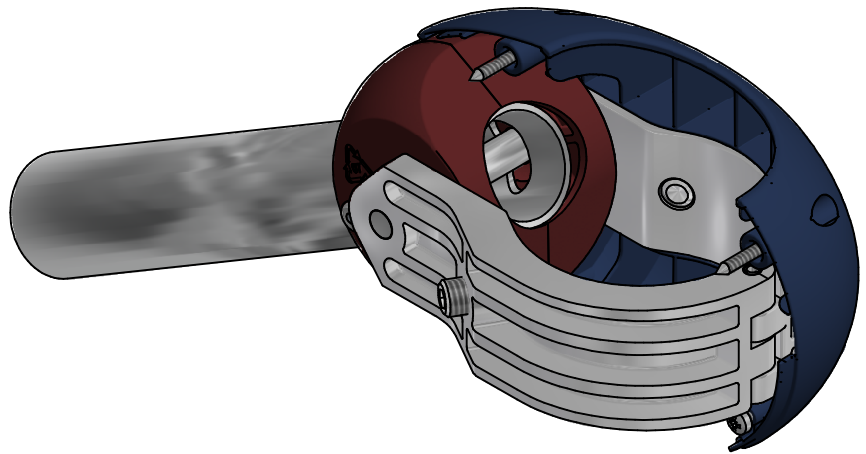

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	6	BSR	005	004	019		Zelfb. schroef	3,5 x 19 - RVS A2-70
2	2	BSR	007	010	020		STELSCHROEF	KRATER M10x20
3	1	BSR	021	010	070		Zeskantbout	M10 x 70 - RVS A2-70
4	2	KST	PNR	010	PA6		Vulbol helft	Pionier 2010
5	2	KST	PRO	901	001	C	Schaaldeel Ei	Pionier
6	1	SME	PNR	059	ALU		Beugel compleet	Ei-koppeling



Benaming
Title Sumbmodule


Opmerking
Comment EI 05

Datum
Date 13-7-2009

Tekening
Drawing

SMD PNR 005 000

Samenstelling module Assembly module

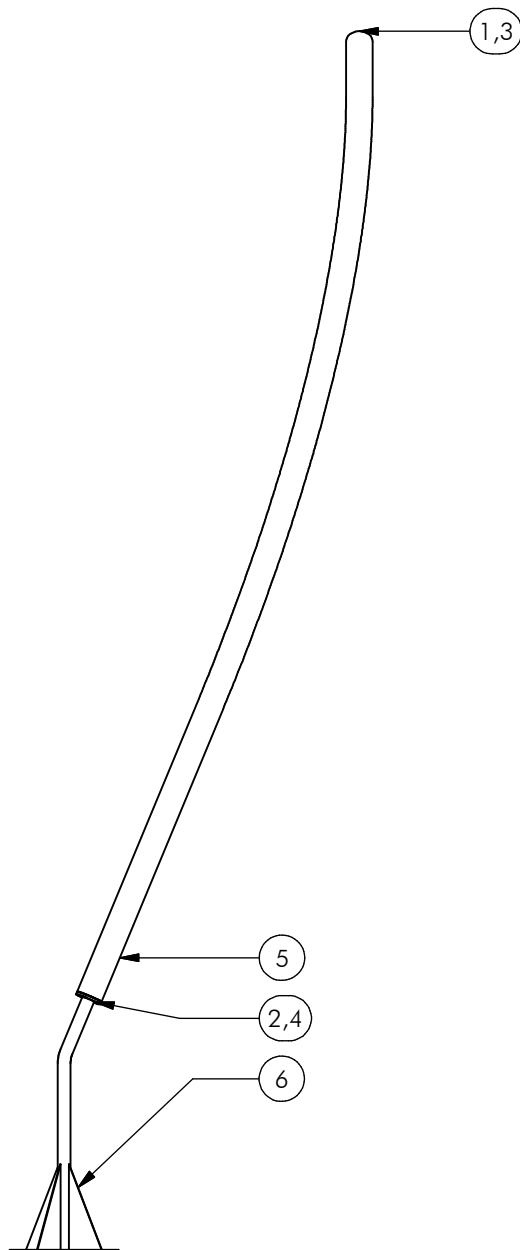

6	1	SME	PNR	011	320	B	GRONDANKER	KNIK
5	1	SME	PNR	001	320	B	STAANDER LANG	50 GRADEN
4	4	KST	DOP	006	030	-	OPVULDOPJE	ZESKANT 6MM
3	5	BSR	030	010	002	-	Sluitring M10	DIN 125
2	4	BSR	027	008	020	-	CILINDERKOPSCHROEF	M8 x 20
1	5	BSR	021	010	016	-	ZESKANTBOUT	M10 x 16
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title | Staander


Opmerking
Comment | Stand 2

Datum
Date | 8-1-2009

Tekening
Drawing

MOD PNR 002 000

Samenstelling module Assembly module

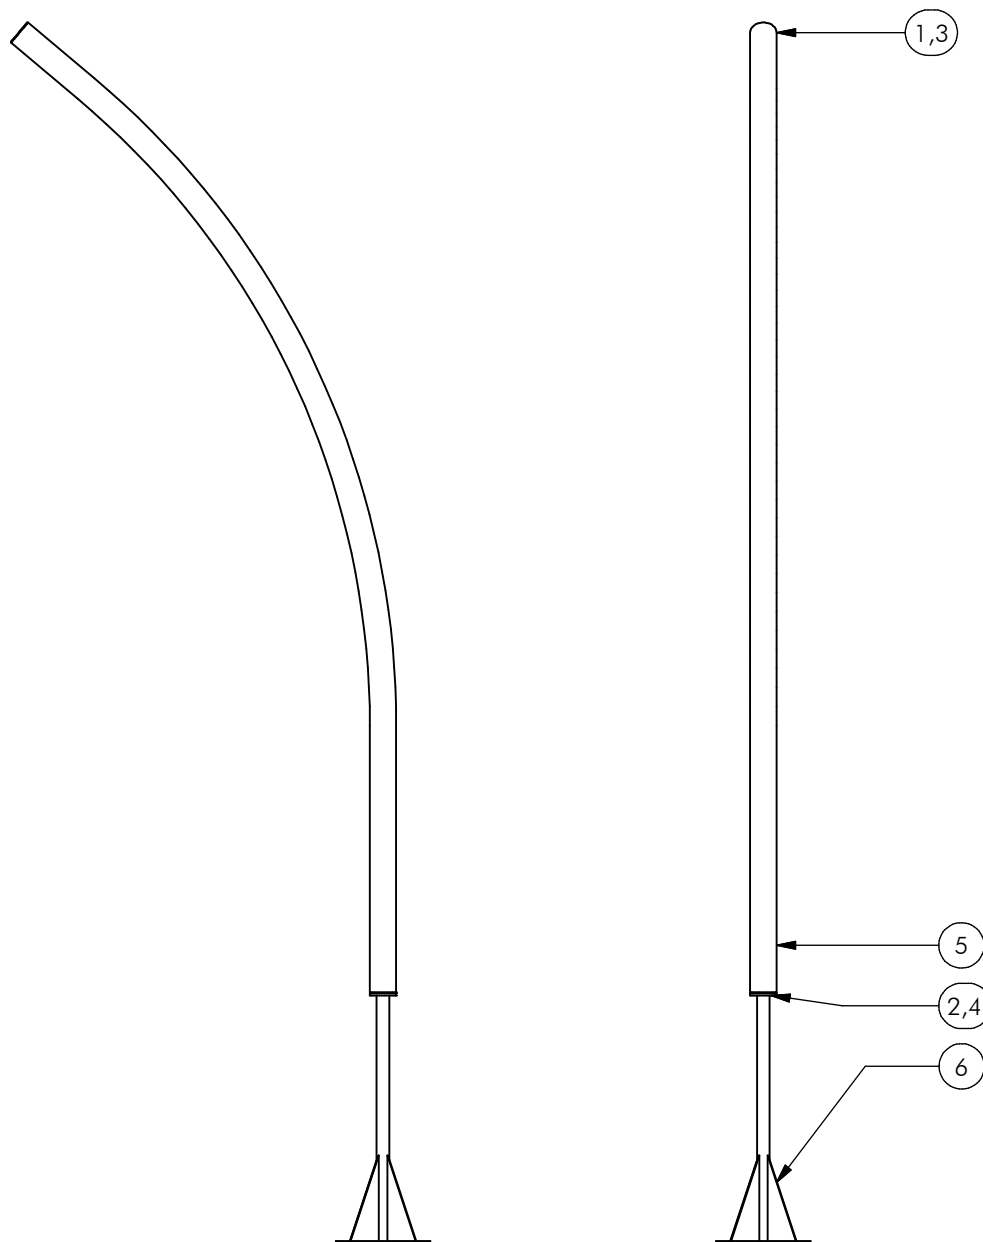

6	1	SME	PNR	007	320	C	GRONDANKER	RECHT
5	1	SME	PNR	002	320	B	STAANDER KORT	50 GRADEN
4	4	KST	DOP	006	030	-	OPVULDOPJE	ZESKANT 6MM
3	5	BSR	030	010	002	-	Sluitring M10	DIN 125
2	4	BSR	027	008	020	-	CILINDERKOPSCHROEF	M8 x 20
1	5	BSR	021	010	016	-	ZESKANTBOUT	M10 x 16
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title: Staander


Opmerking
Comment: Stand 3

Datum
Date: 8-1-2009

Tekening
Drawing

MOD PNR 003 000

Samenstelling module *Assembly module*

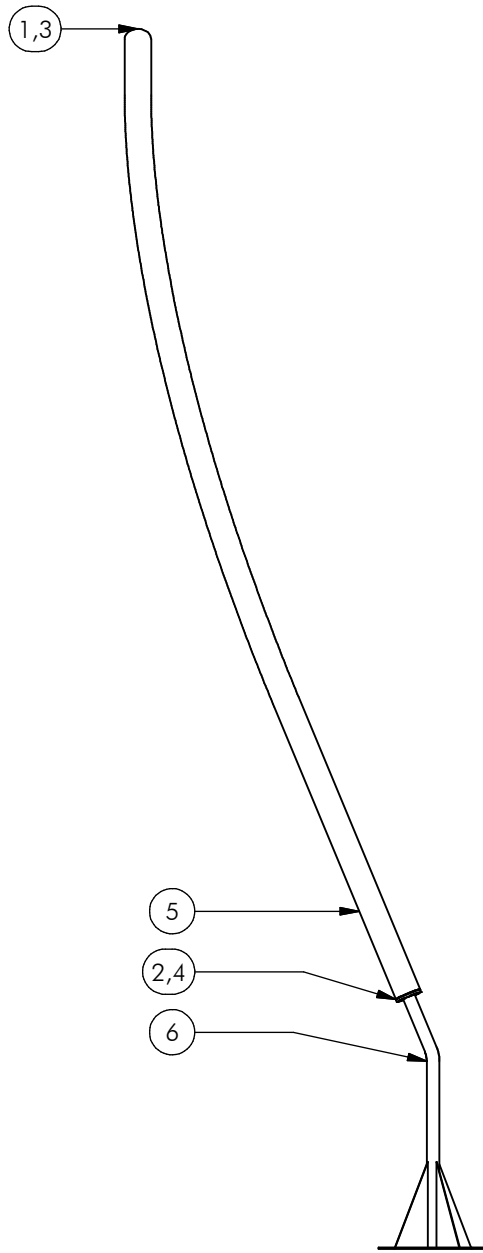

6	1	SME	PNR	011	320	B	GRONDANKER	KNIK
5	1	SME	PNR	001	320	B	STAANDER LANG	50 GRADEN
4	4	KST	DOP	006	030	-	OPVULDOPJE	ZESKANT 6MM
3	5	BSR	030	010	002	-	Sluitring M10	DIN 125
2	4	BSR	027	008	020	-	CILINDERKOPSCHROEF	M8 x 20
1	5	BSR	021	010	016	-	ZESKANTBOUT	M10 x 16
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING




Benaming
Title | Staander _____
Opmerking
Comment | Stand 4 _____
Datum
Date | 8-1-2009 _____

Tekening
Drawing

MOD PNR 004 000

Samenstelling module Assembly module

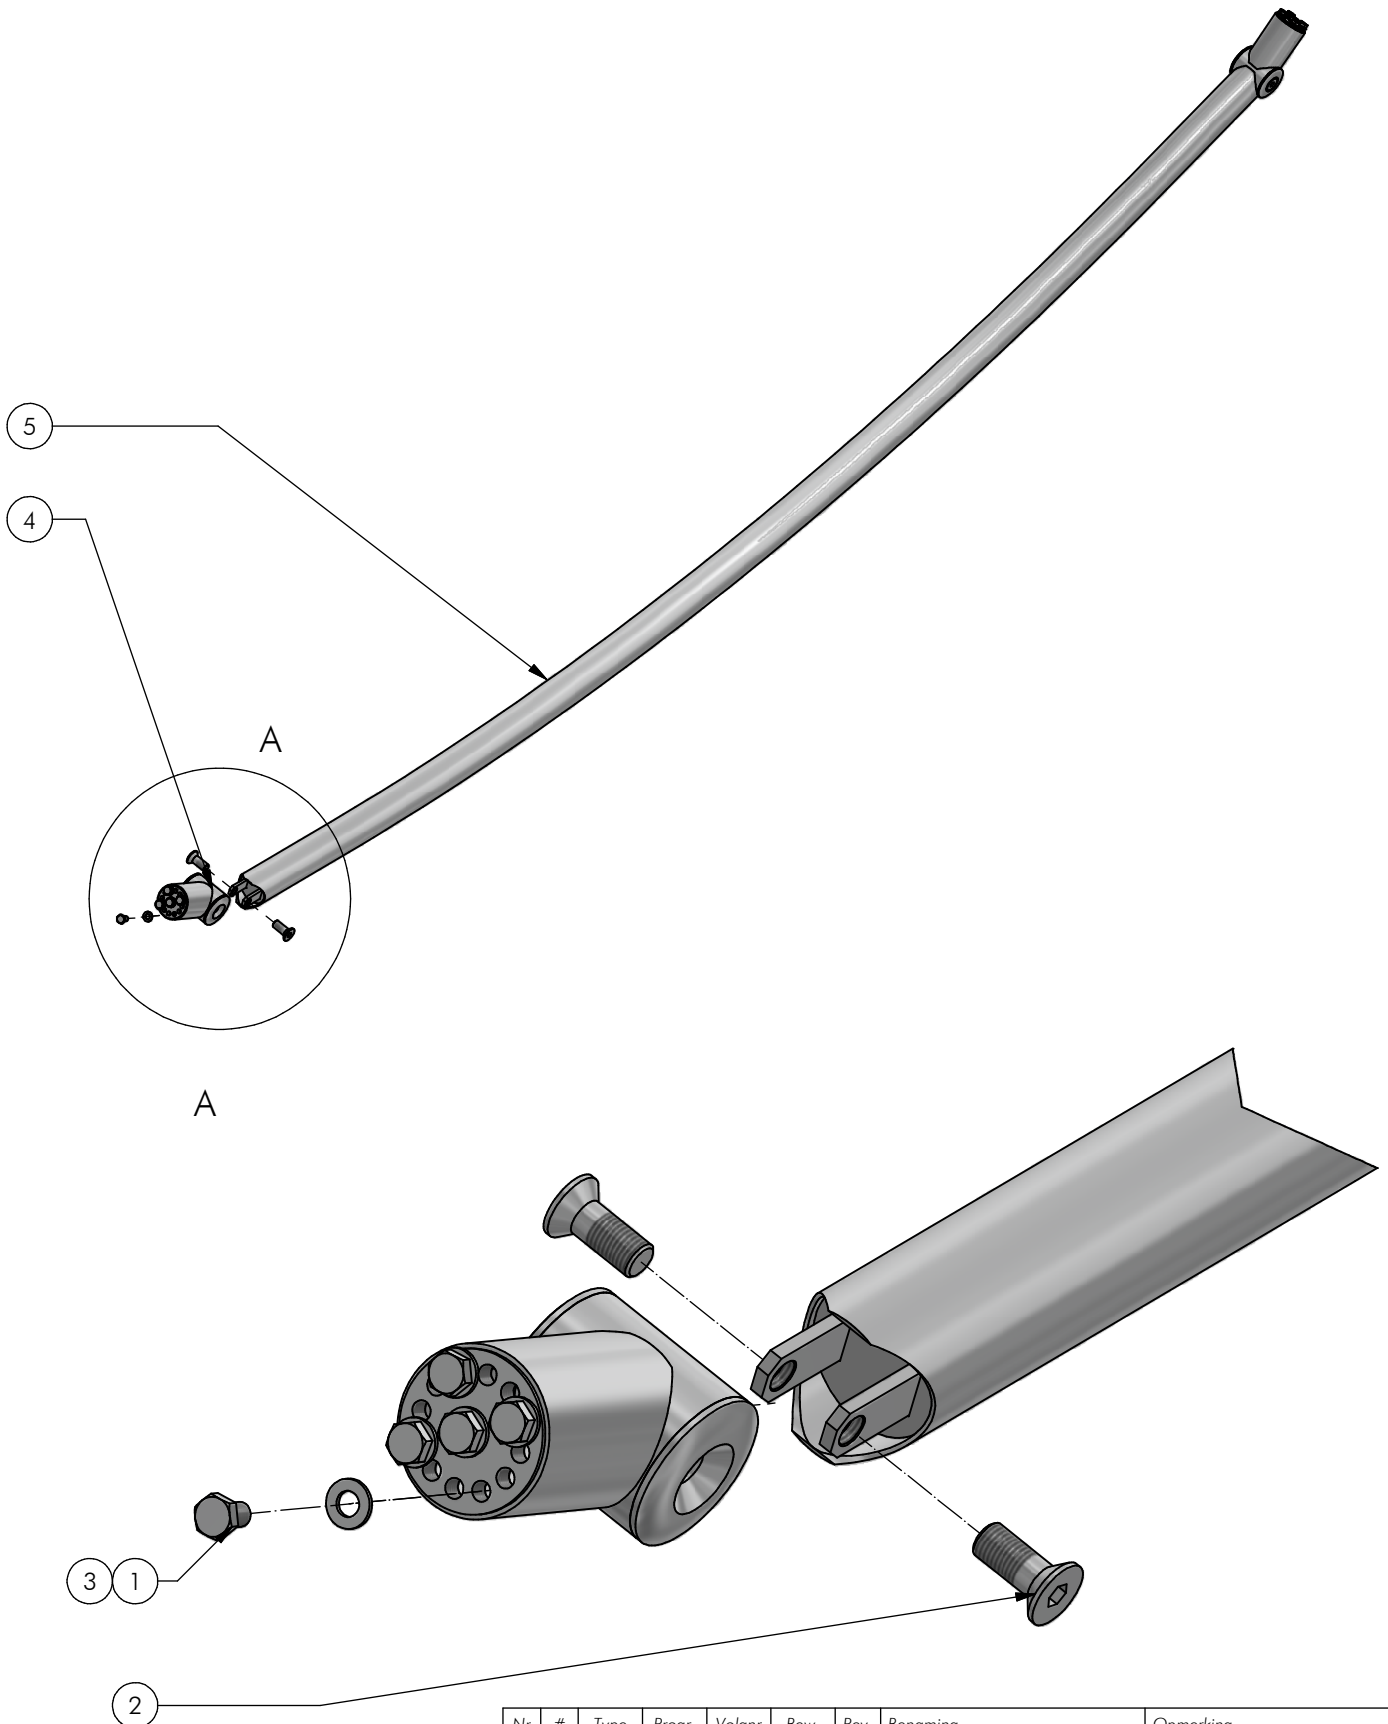

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	10	BSR	021	010	016		Zeskantbout	M10 x 16 - RVS A2-70
2	4	BSR	024	016	040		Verzonken bout	M16 x 40 - RVS A2-70
3	10	BSR	030	010	002		SLUITRING	M10
4	2	SME	PNR	004	320	B	KOPPELSTUK	TUSSENBUIS
5	1	SME	PNR	006	320	D	MIDDENDEEL	KOPPELBUIS




Benaming Title TUSSENBUIS
 Opmerking Comment STAND 393
 Datum Date 30-11-2004

Tekening Drawing

MOD PNR 005 000

Samenstelling module Assembly module

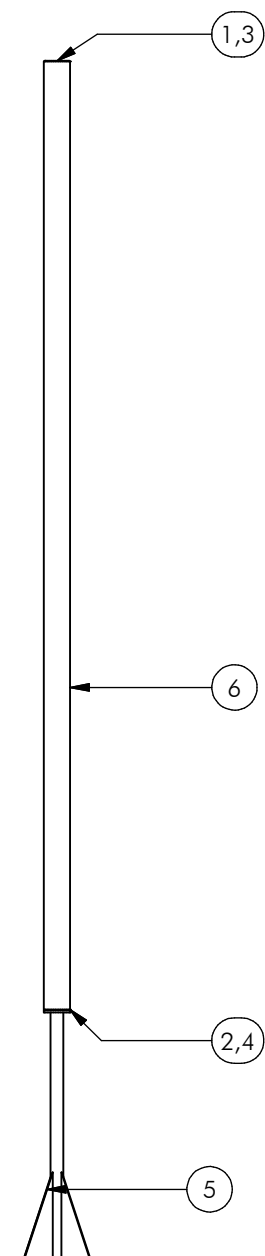

6	1	SME	PNR	010	320	D	MIDDENSTAANDER	RECHT
5	1	SME	PNR	007	320	C	GRONDANKER	RECHT
4	4	KST	DOP	006	030	-	OPVULDOPJE	ZESKANT 6MM
3	5	BSR	030	010	002	-	Sluitring M10	DIN 125
2	4	BSR	027	008	020	-	CILINDERKOPSCHROEF	M8 x 20
1	5	BSR	021	010	016	-	ZESKANTBOUT	M10 x 16
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title: Staander


Opmerking
Comment: Midden stand 0

Datum
Date: 8-1-2009

Tekening
Drawing

MOD PNR 010 000

Samenstelling module *Assembly module*

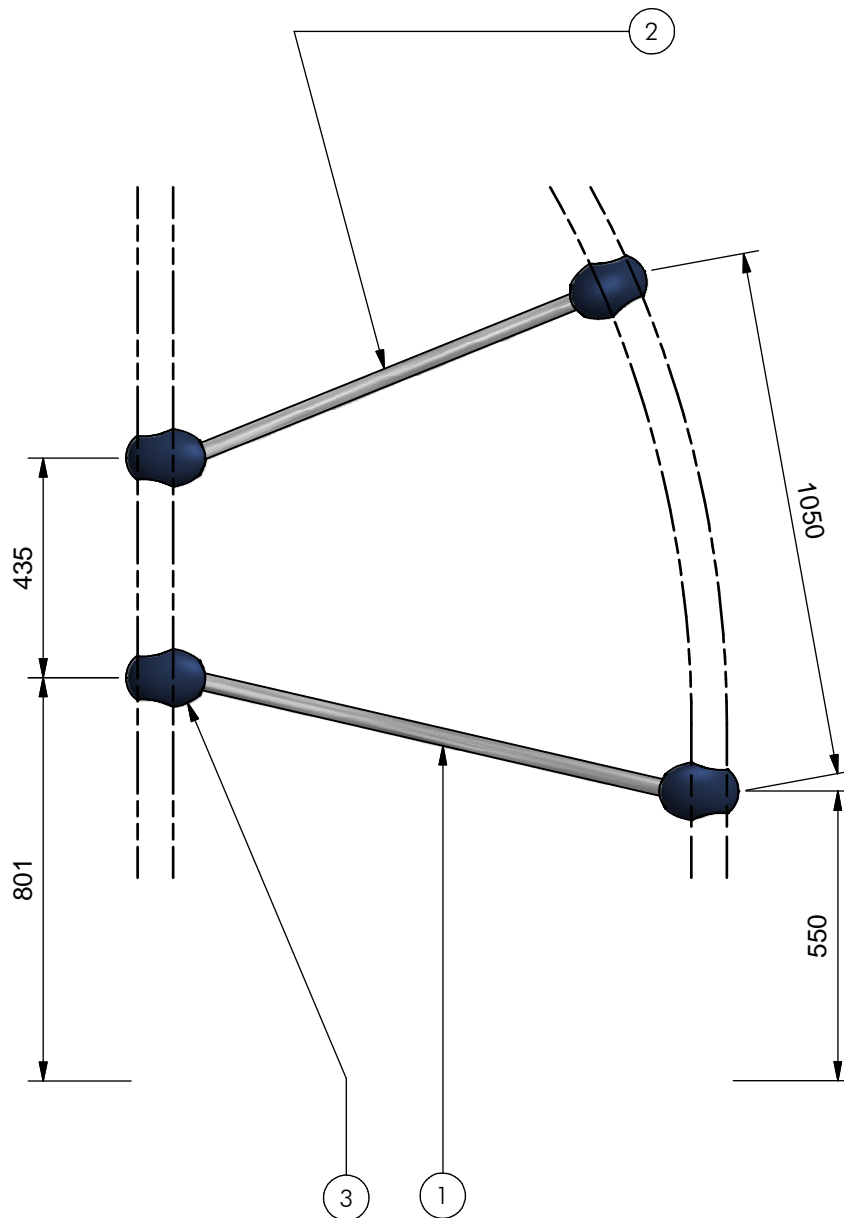

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	1	OME	PNR	130	100		Klimstang PNR 33.7x2	Lengte 1000 mm HOH
2	1	OME	PNR	130	086		Klimstang PNR 33.7x2	Lengte 860 cm HOH
3	4	SMD	PNR	005	000		Submodule	EI 05



Benaming
Title: Buizenwand




Opmerking
Comment: Half zeil

Datum
Date: 13-8-2010

Tekening
Drawing

MOD PNR 304 300

Samenstelling module *Assembly module*

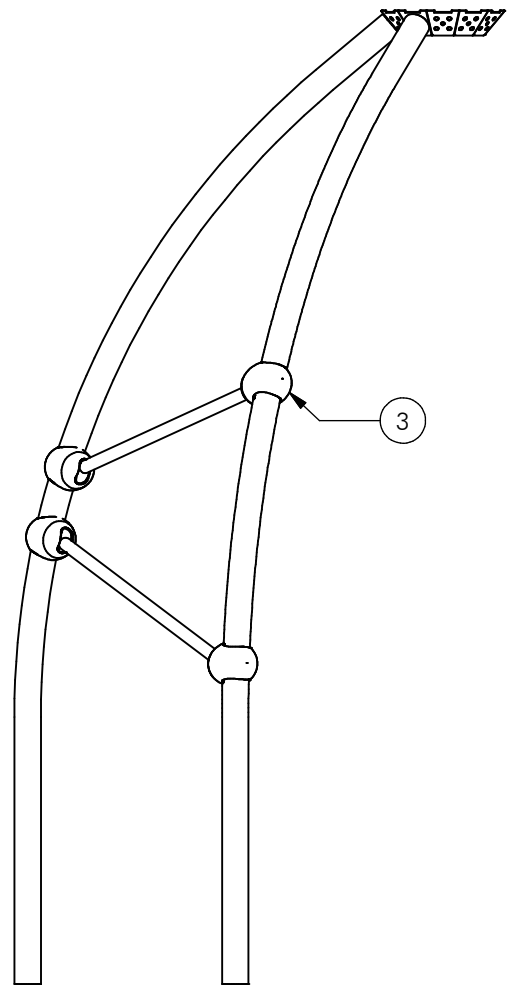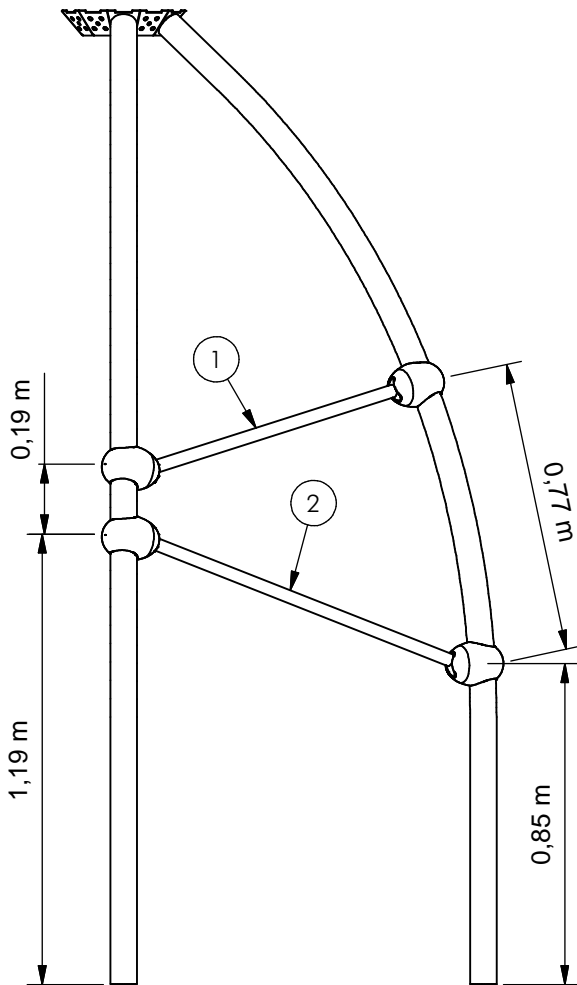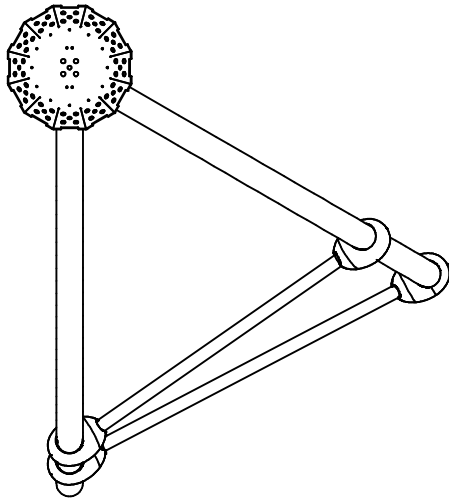

3	4	SMD	PNR	005	000		Submodule	EI 05
2	1	OME	PNR	130	100		Klimstang PNR 33.7x2	Lengte 1000 cm HOH
1	1	OME	PNR	130	086		Klimstang PNR 33.7x2	Lengte 860 cm HOH
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title Buizenwand



Opmerking
Comment Zig

Datum
Date 8-1-2009

Tekening
Drawing

MOD PNR 309 323

Samenstelling module *Assembly module*

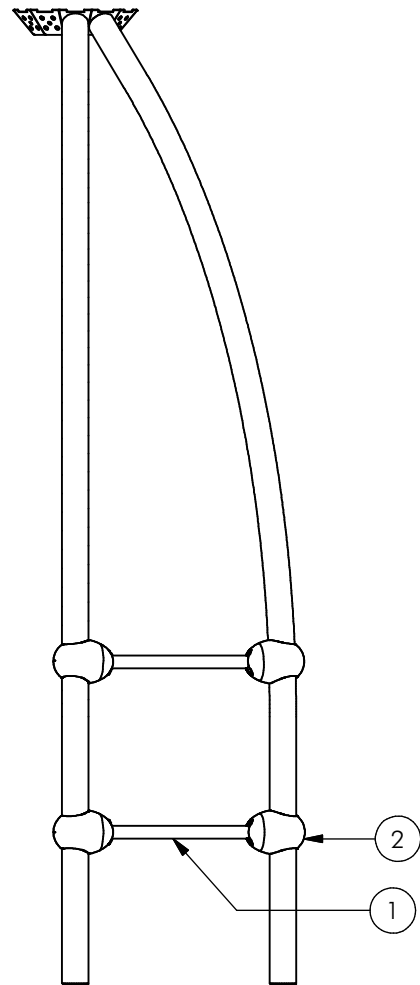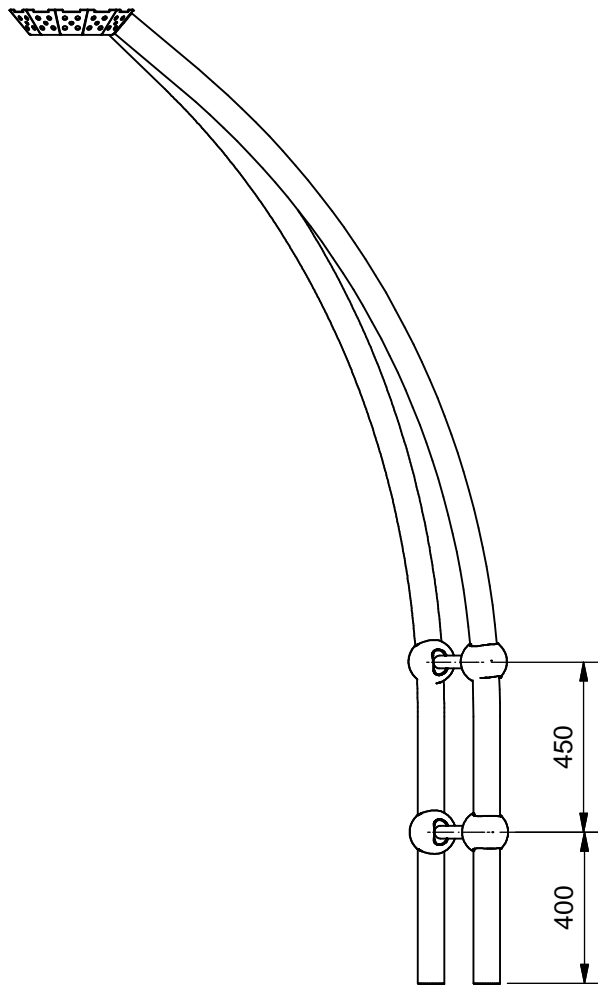

2	4	SMD	PNR	005	000	Submodule	EI 05	
1	2	OME	PNR	130	044	Klimstang PNR 33.7x2	Lengte 440 cm HOH	
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title Buizenwand


Opmerking
Comment Recht

Datum
Date 8-1-2009

Tekening
Drawing

MOD PNR 310 313

Samenstelling module *Assembly module*

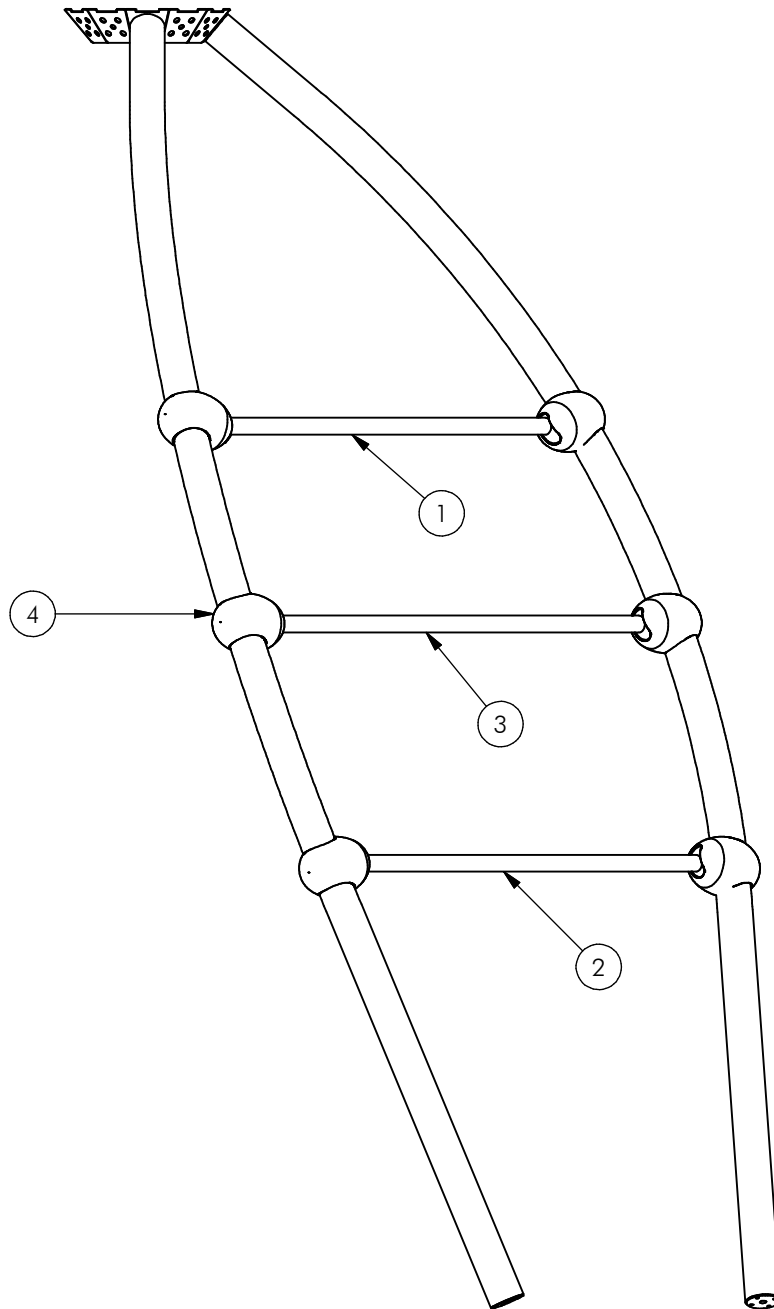

4	6	SMD	PNR	005	000		Submodule	EI 05
3	1	OME	PNR	130	108		Klimstang PNR 33.7x2	Lengte 1080 cm HOH
2	1	OME	PNR	130	101		Klimstang PNR 33.7x3	Lengte 1010 cm HOH
1	1	OME	PNR	130	097		Klimstang PNR 33.7x2	Lengte 970 cm HOH
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title Buizenwand


Opmerking
Comment Recht

Datum
Date 8-1-2009

Tekening
Drawing

MOD PNR 310 432

Samenstelling module *Assembly module*

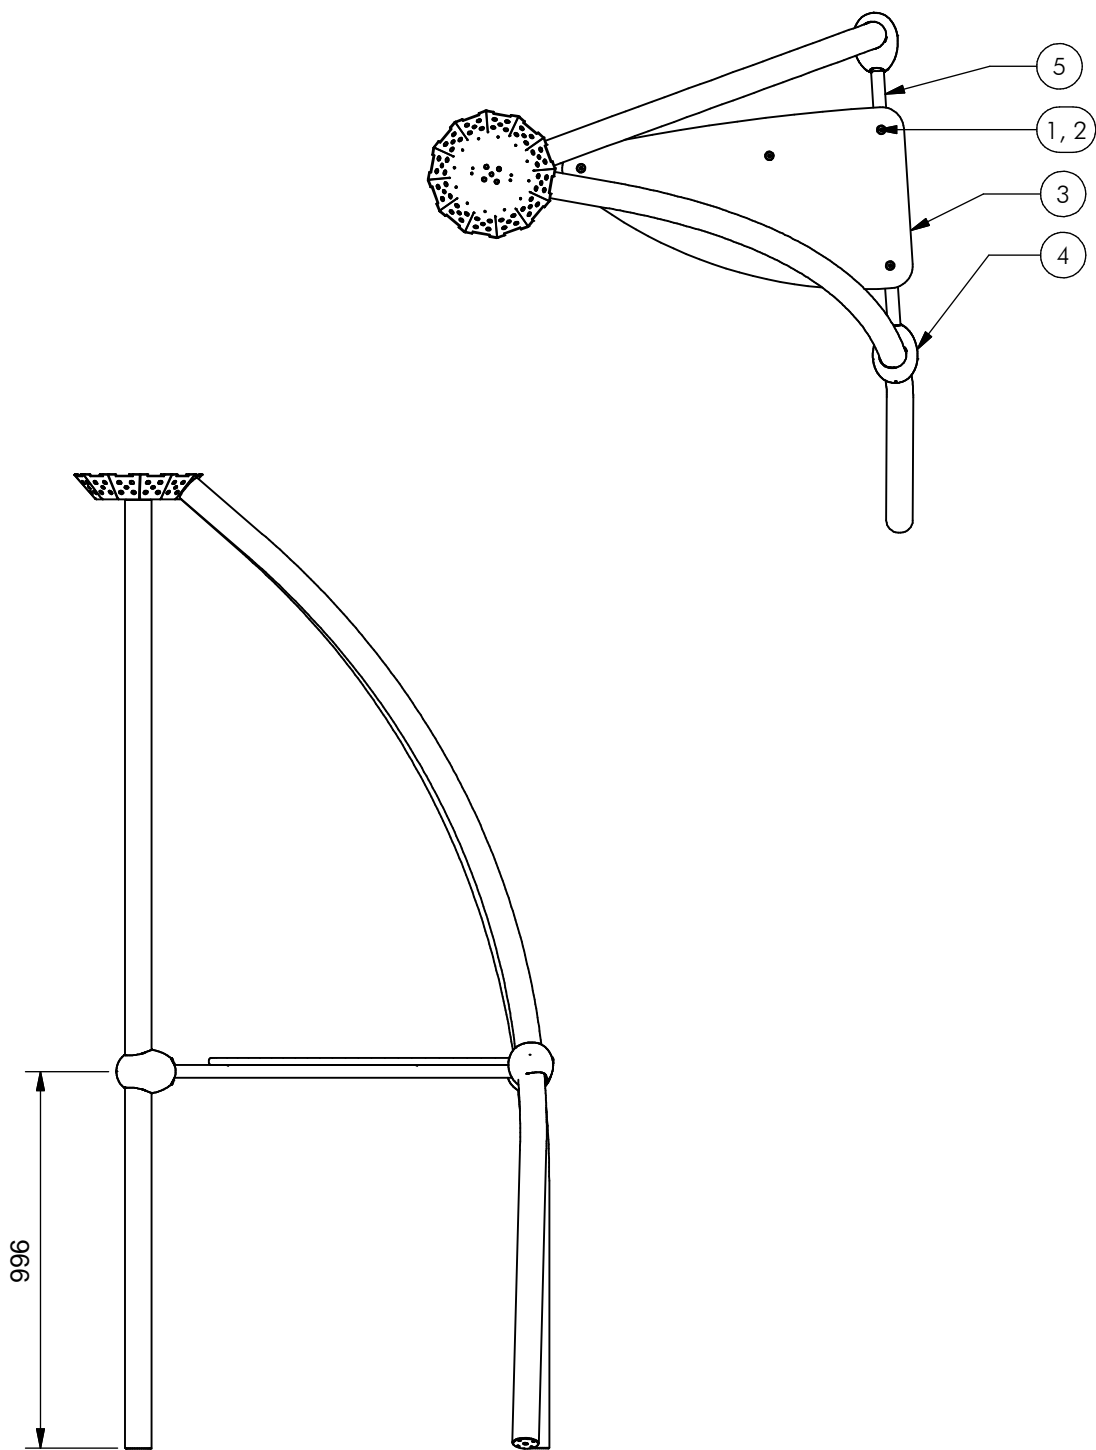

5	1	SME	PNR	031	320	B	Frame	Vloerplaat bol
4	3	SMD	PNR	005	000		Submodule	EI 05
3	1	OPE	PNR	010	010	A	VLOERPLAAT	BOL
2	4	KST	DOP	006	030		OPVULDOPJE	6 MM ROOD
1	4	BSR	024	010	030		Verzonken bout	M10 x 30 - RVS A2-70
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title | Vloer


Opmerking
Comment | Bol

Datum
Date | 28-10-2013

Tekening
Drawing

MOD PNR 317 213 A

Samenstelling module *Assembly module*

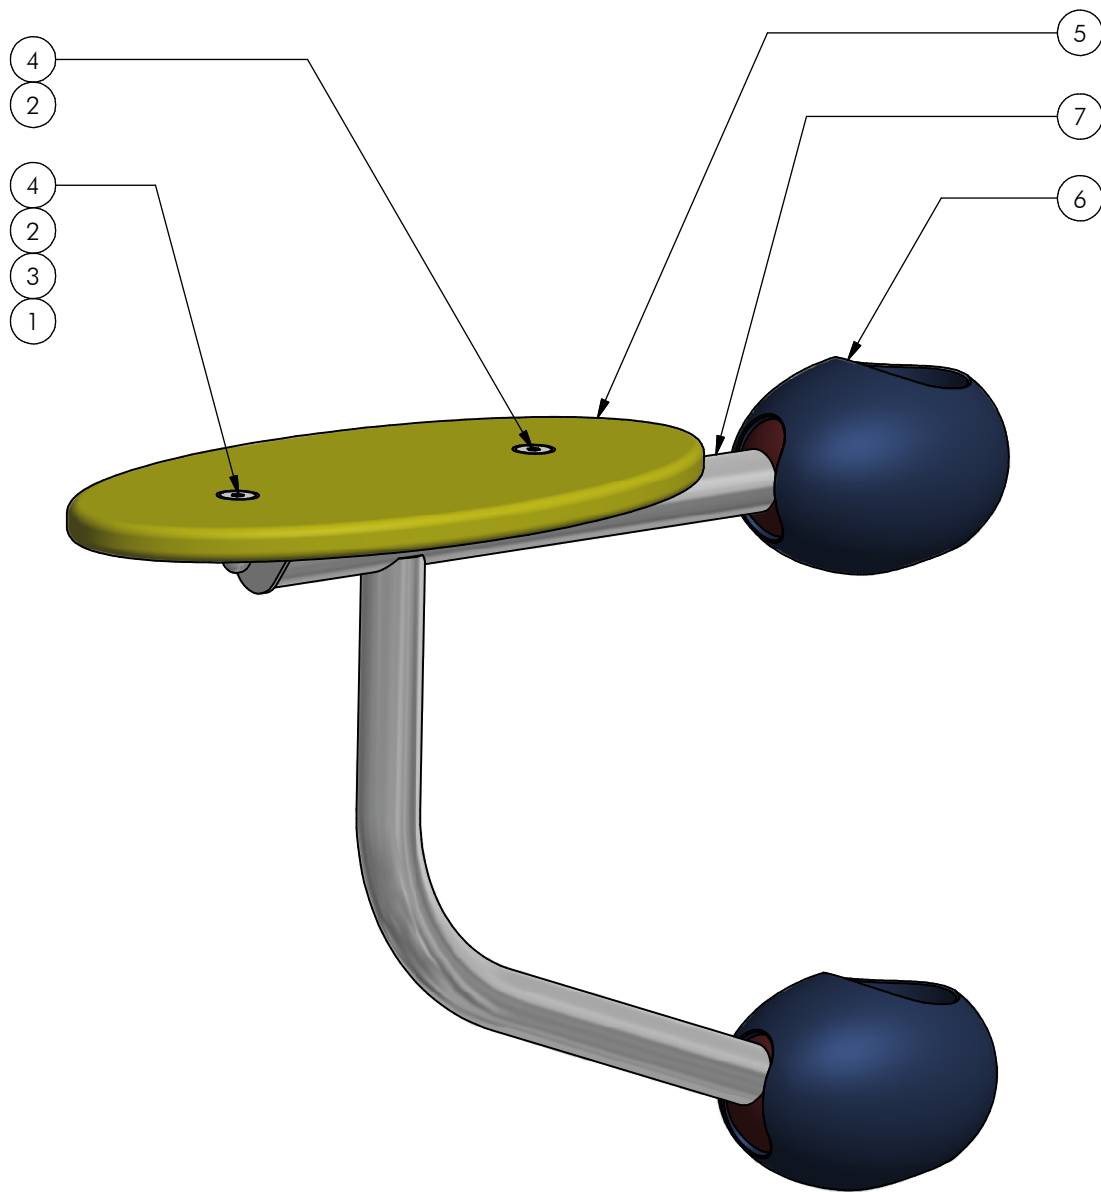

Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	1	BSR	011	010	020		Borgdopmoer	M10 - RVS A2-70
2	2	BSR	024	010	030		Verzonken bout	M10 x 30 - RVS A2-70
3	1	BSR	030	010	002		SLUITRING	M10
4	2	KST	DOP	006	030		OPVULDOPJE	6 MM ROOD
5	1	OPE	PNR	006	010	A	ZITPLAAT	ZITJE
6	2	SMD	PNR	005	000		Submodule	EI 05
7	1	SME	PNR	025	320	F	Beugel zitje	Recht




Benaming
Title Zitje

Opmerking
Comment Recht


Datum
Date 28-10-2013

Tekening
Drawing


MOD PNR 323 000 A
Samenstelling module Assembly module

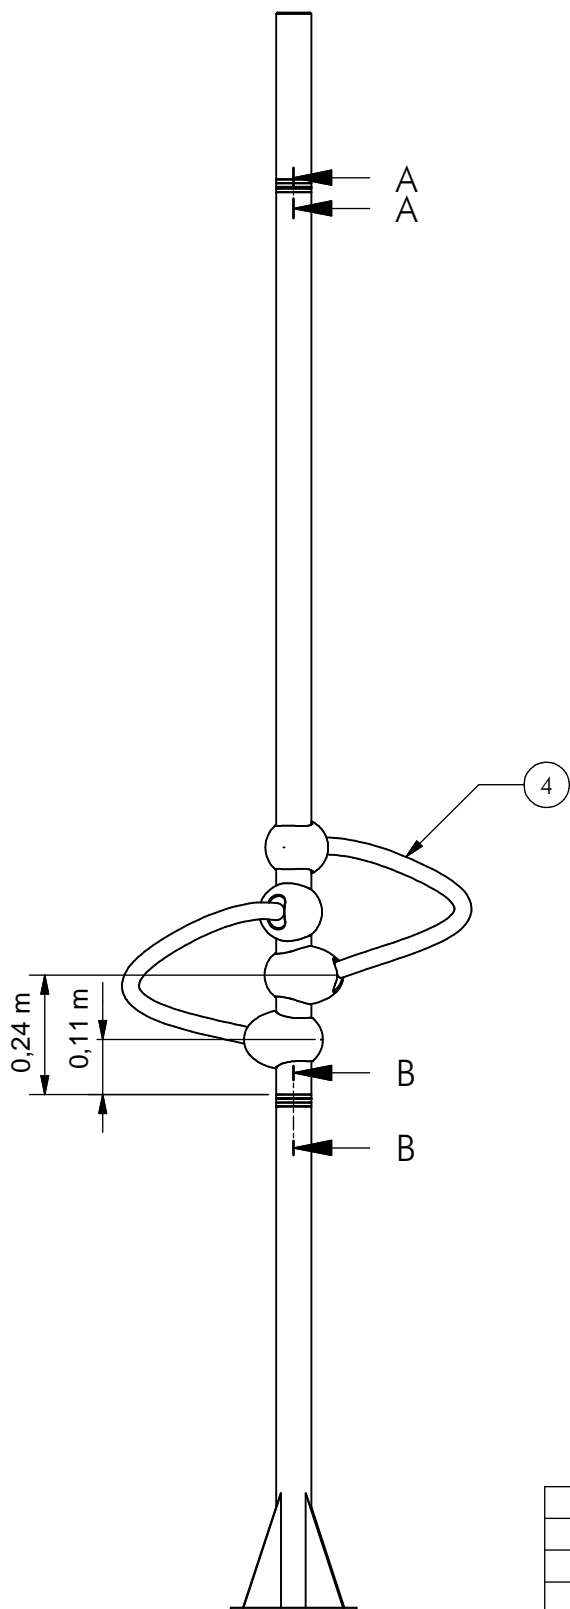

A-A (1 : 2)

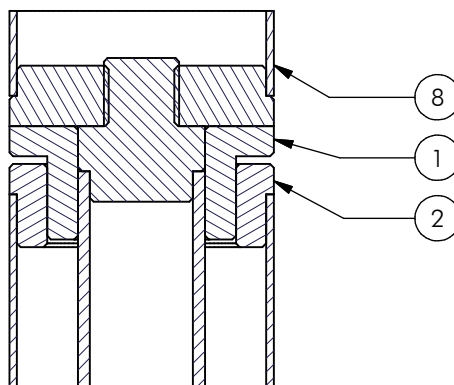

B-B (1 : 2)

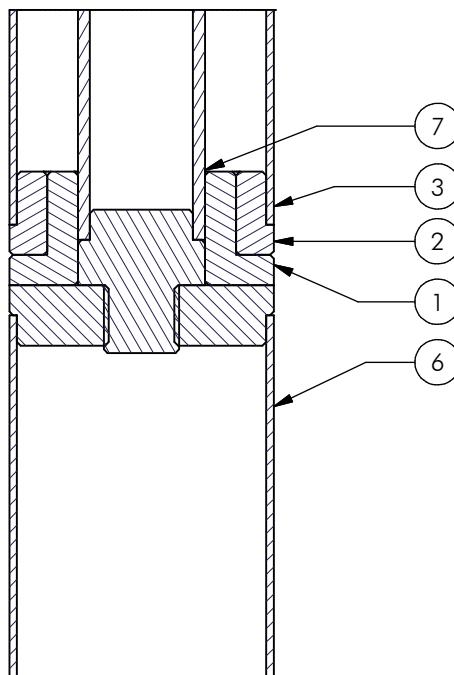

8	1	SME	PNR	066	320	Bovenbuis	Wentel	
7	1	SME	PNR	065	304	Middenbuis	Wentel	
6	1	SME	PNR	064	320	Grondanker	Draaipaal	
5	4	SMD	PNR	005	000	Submodule	EI 05	
4	2	OME	PNR	018	320	B Wokkelbuis	Wokkel	
3	1	OME	106	015	320	BUIS 70 x 2	Lengte = 1790 mm	
2	2	KST	PNR	008	POM	Glijlager groot	Wentel	
1	2	KST	PNR	007	POM	Glijlager klein	Wentel	
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title: Staander


Opmerking
Comment: Wentel

Datum
Date: 29-6-2009

Tekening
Drawing

MOD PNR 335 010

Samenstelling module Assembly module

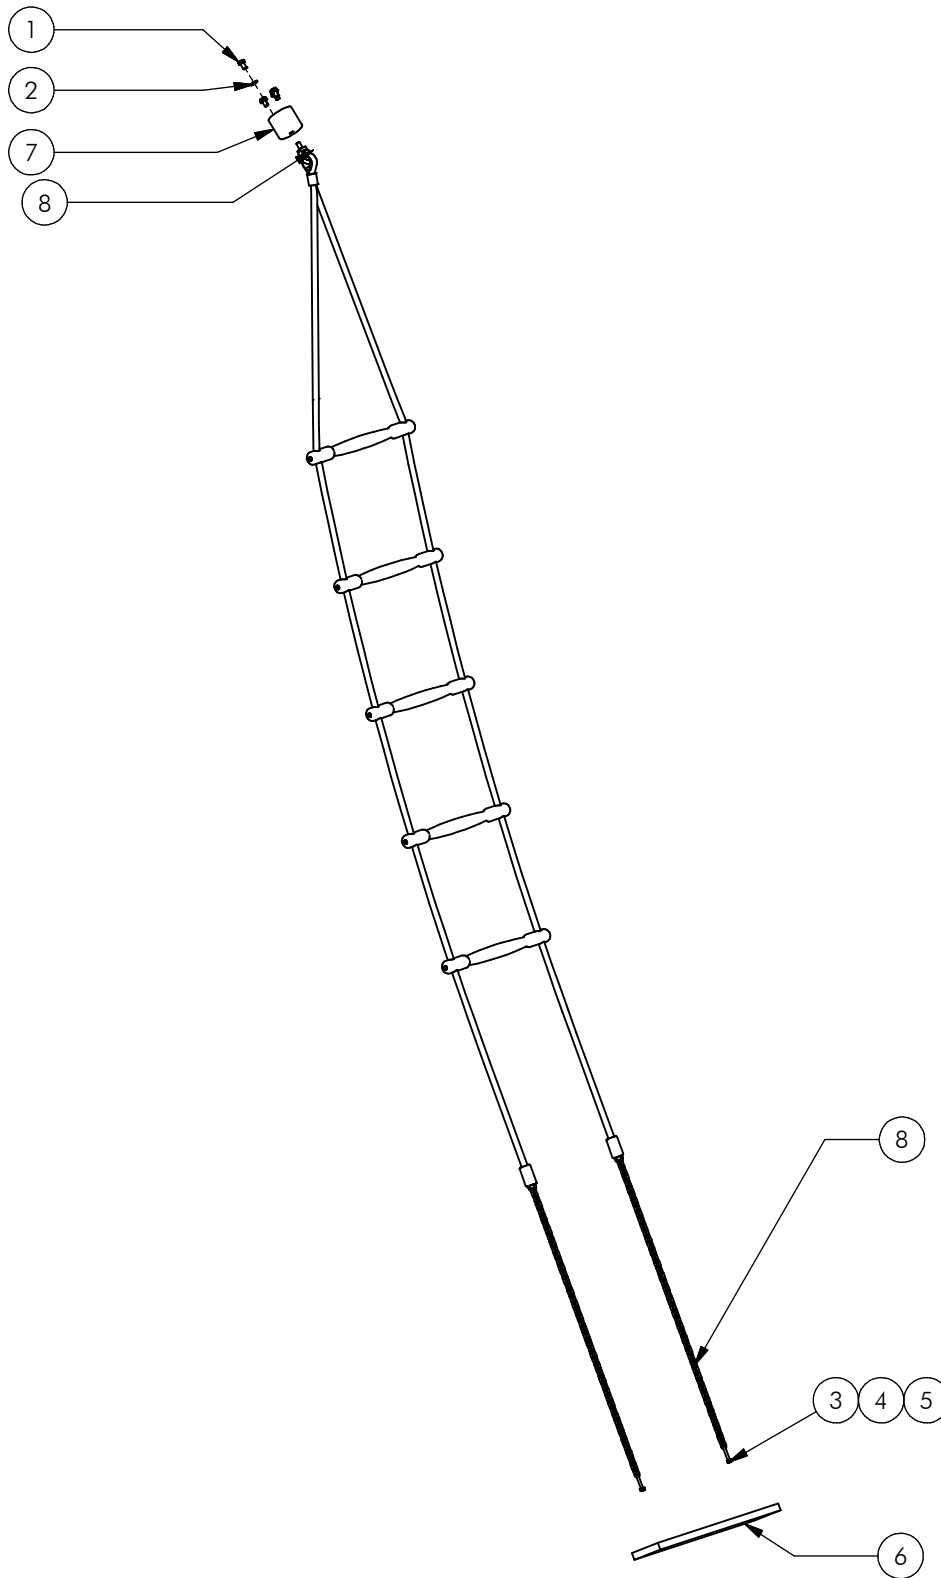


Nr	#	Type	Progr.	Volgnr	Bew.	Rev.	Benaming	Opmerking
1	4	BSR	021	010	016		Zeskantbout	M10 x 16 - RVS A2-70
2	4	BSR	030	010	002		Sluitring	M10 - RVS A2-70
3	2	BSV	017	006	005		Zeskantmoer	M6 - VZ 8.8
4	2	BSV	021	006	050		Zeskantbout ISO 4014	M6 x 50 - VZ 8.8
5	4	BSV	030	006	002		Sluitring	M6 - VZ 8.8
6	1	KST	APL	050			Ankerplaat	500x100x19
7	1	OME	PNR	126	320		Koppelbus	Touw
8	1	SNT	PNR	013	016	B	Klimladder	Pionier



Benaming Title Klimladder
 Opmerking Comment Pionier
 Datum Date 6-4-2010

Tekening Drawing

MOD PNR 337 003 A
 Samenstelling module Assembly module

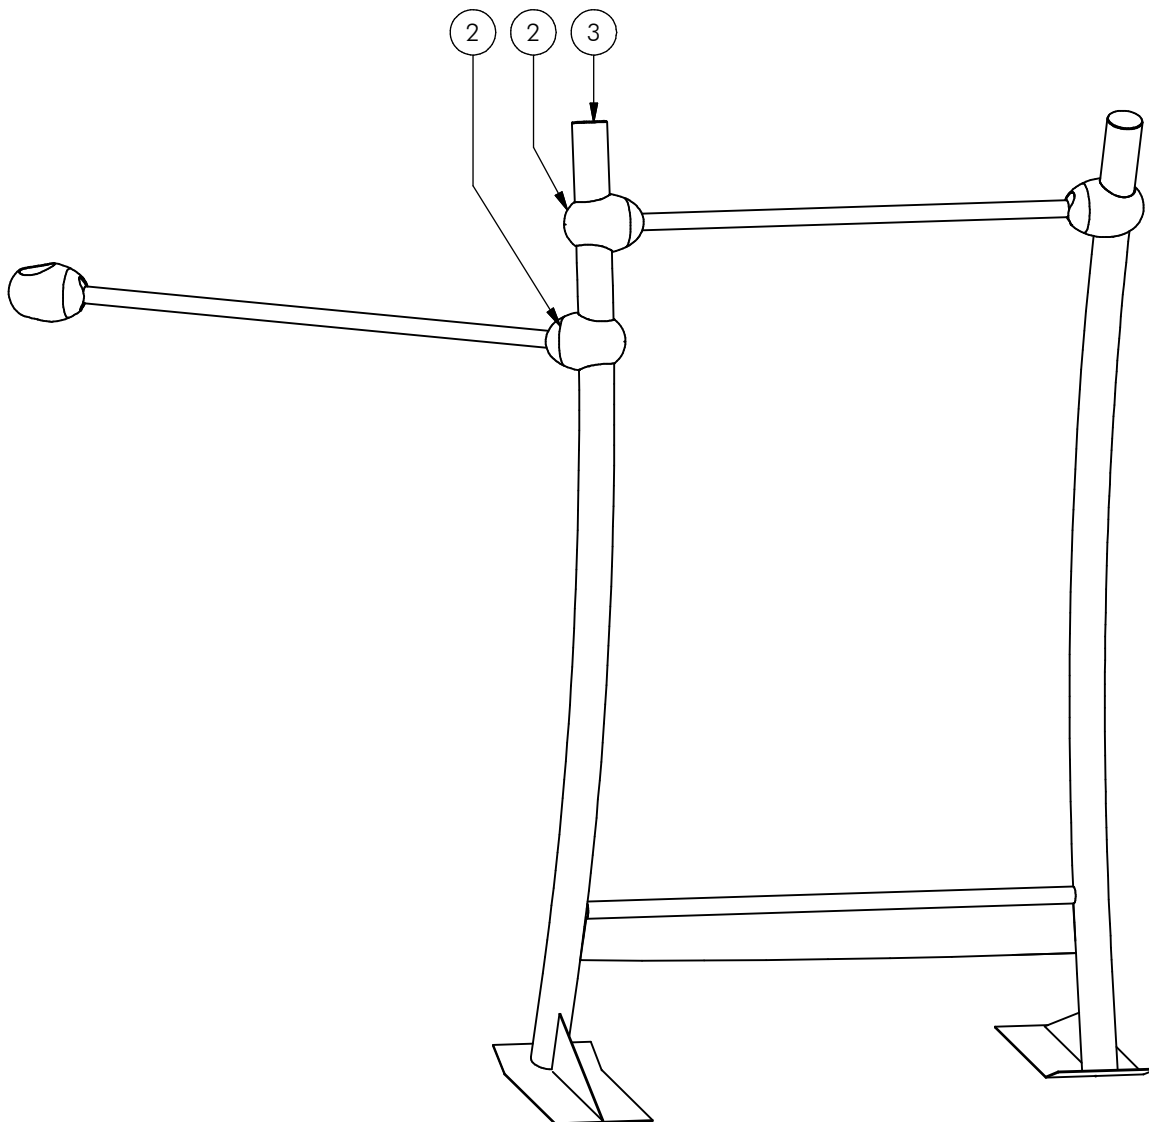

8	1	OME	PNR	130	102		Klimstang PNR 33.7x2	Lengte 1020 cm HOH
3	1	SME	PNR	201	320	A	Duikel frame	115 cm
2	4	SMD	PNR	005	000		Submodule	EI 05
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title Aanbouwduikel


Opmerking
Comment Enkel

Datum
Date 15-1-2010

Tekening
Drawing

MOD PNR 342 003

Samenstelling module *Assembly module*

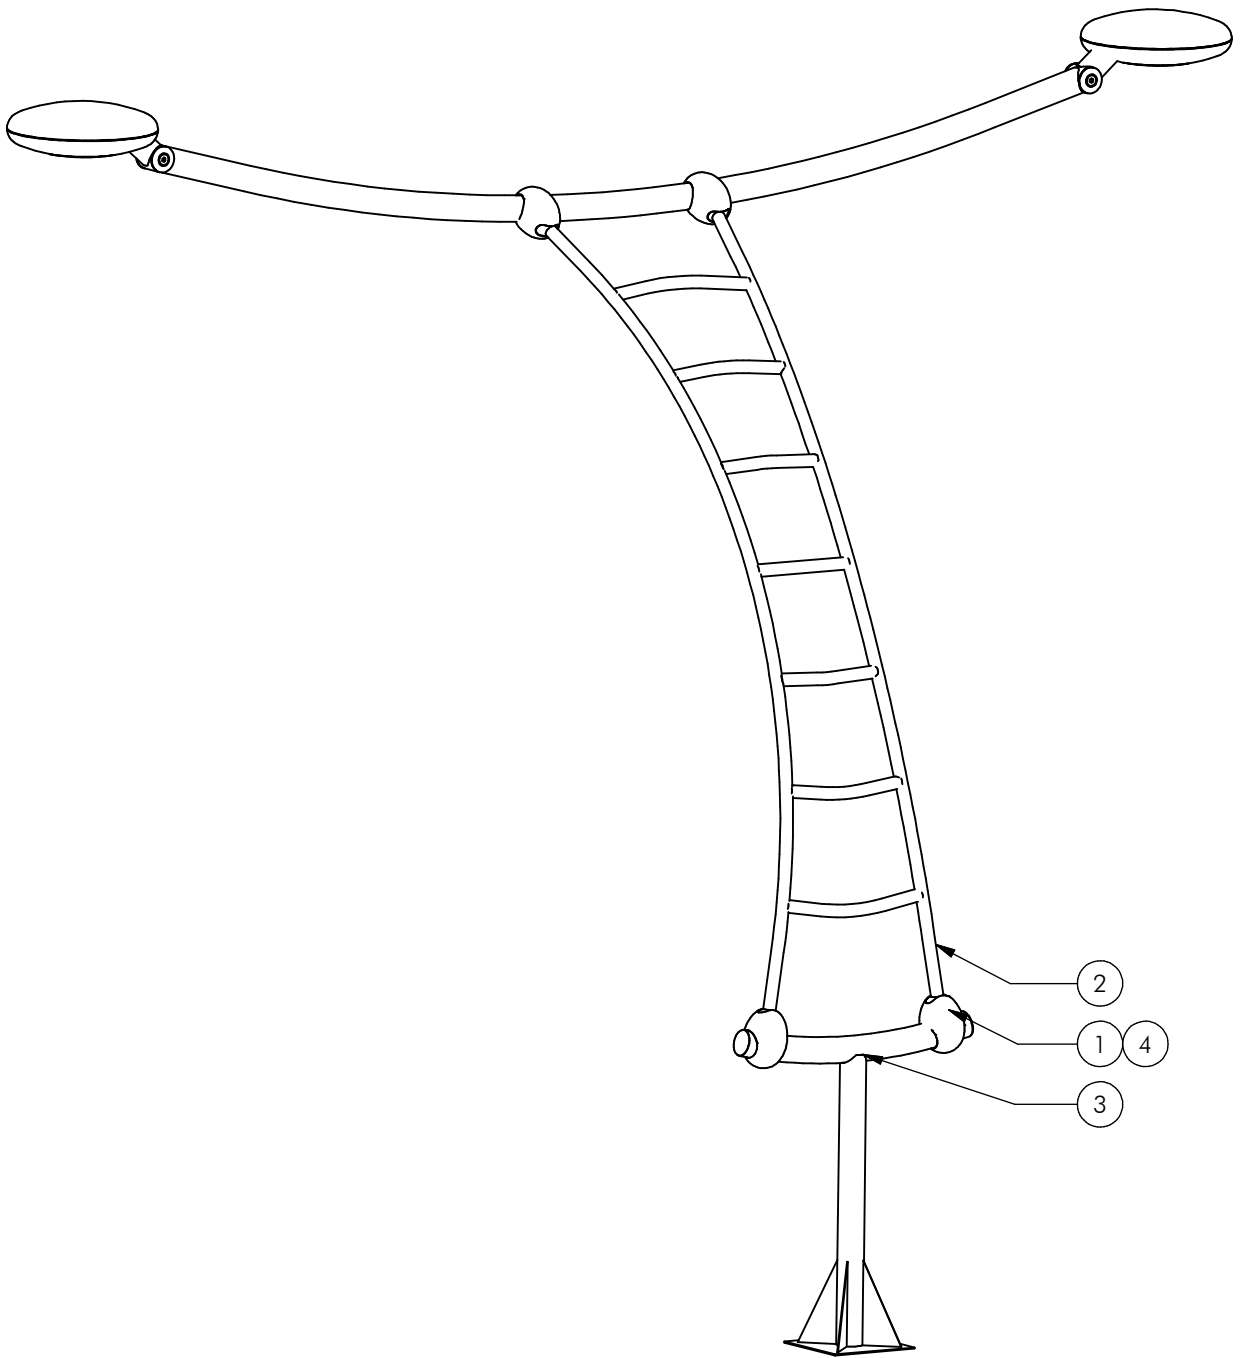

4	4	SME	PNR	371	304		Bevestigings Buis	met M10 Draad
3	1	SME	PNR	070	320		Grondanker	Trap
2	1	SME	PNR	050	320	B	Boogrek	Lang
1	4	SMD	PNR	005	000		Submodule	EI 05
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title Ladderboog


Opmerking
Comment DWars

Datum
Date 31-7-2009

Tekening
Drawing

MOD PNR 347 393

Samenstelling module *Assembly module*

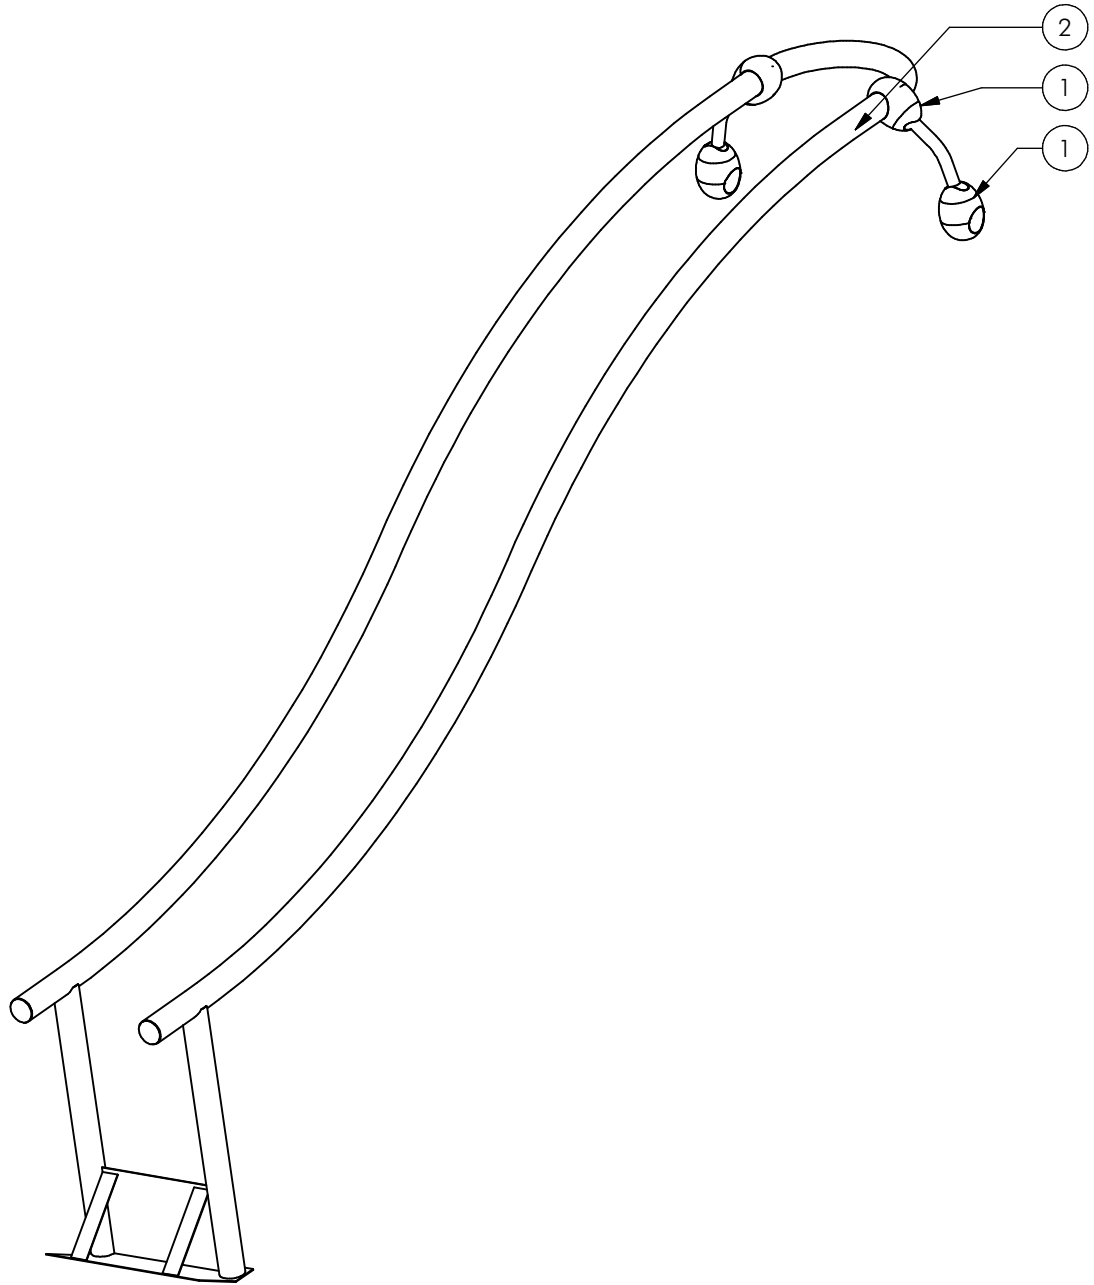

2	1	SME	PNR	069	320		Glijbuizen	Dubbel
1	4	SMD	PNR	005	000		Submodule	EI 05
POS	N	TYPE	PROJ.	NR.	BEH.	R	BENAMING	OPMERKING



Benaming
Title | Glijbuizen

Opmerking
Comment | Dwars

Datum
Date | 31-7-2009

Tekening
Drawing

MOD PNR 348 393

Samenstelling module *Assembly module*